




120W LED High Bay


120W 6~12m Illuminance Distribution Plot

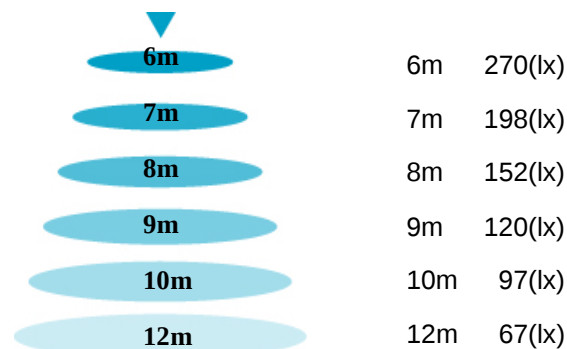


LED HIGH BAY SPECIFICATION

Model No.	LB3-LF03-1-120-RNIIPPX07265-A
Input Voltage	120~277(Vac)
Frequency	47-63(Hz)
LED Qty	72(pcs)
Rated Power	120±10%(W)
Lumens per Watt (Efficacy)	100(lm/W)
E _{max}	(Height= 8m): ≥ 152(lx)
	(Height= 10m): ≥ 97(lx)
Color Temp.(CCT)	4000K-6000K
CRI	Ra>70
Power Factor	>0.95
THD_I (%)	<15%
Operating Ambient Temp.	-40℃~50℃
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40℃~80℃
Life time(L70)	≥ 50000(hrs)
Architecture	Aluminum casting & tempered glass
Dimensions (mm)	264*362*282.5
Weight	7.7 ± 0.2 kg
Waterproof	IP65
Beam Angle(°)	50°

120W Distribution Plot

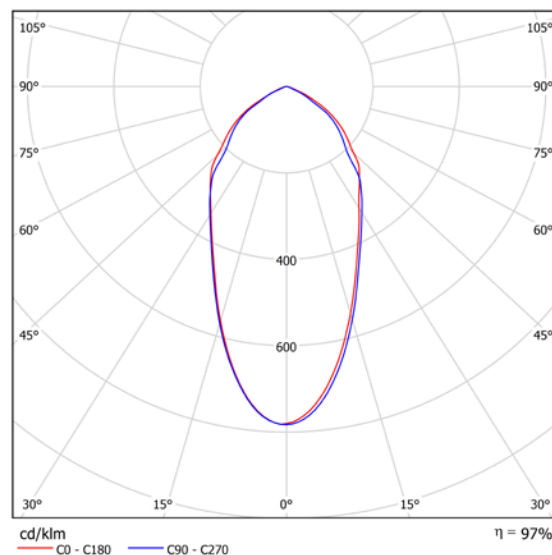

Outline Dimensions

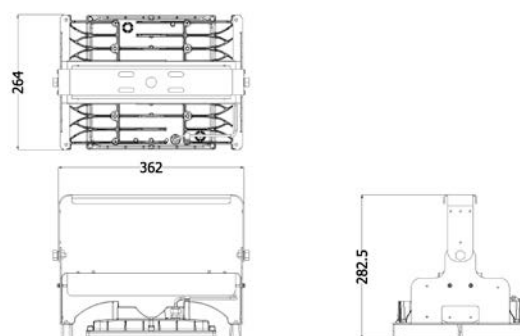

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

