




LED T8 Glass Tube (8W)



Module	Dimension
T8-600mm	LxD=595x25.8 mm

Specification

Model No.	LOM-T8C0806F7-G	LOM-T8N0806F7-G	LOM-T8W0806F7-G
Input Voltage	AC 185 ~ 265V	AC 185 ~ 265V	AC 185 ~ 265V
Rated Power	8 W $\pm$ 10%	8 W $\pm$ 10%	8 W $\pm$ 10%
Total Lumens	800lm	720 lm	720 lm
Lumens Efficiency	100lm/W	90 lm/W	90 lm/W
Color Temp.	6500 $\pm$ 500 K	4000 $\pm$ 500K	3000 $\pm$ 500K
CRI	≥ 70	≥ 70	≥ 70
Power Factor	>0.5	>0.5	>0.5
Base	G13	G13	G13
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Beam Angle	320° $\pm$ 10%	320° $\pm$ 10%	320° $\pm$ 10%
Life Time	20000 hrs	20000 hrs	20000 hrs
Dimensions	595 * 25.8 mm	595 * 25.8 mm	595 * 25.8 mm
Weight	115 $\pm$ 20 g	115 $\pm$ 20 g	115 $\pm$ 20 g
Lens Type	Foggy	Foggy	Foggy


Remarks

- 1.The tolerance of luminous flux is $\pm$ 10%.
2. The dimension tolerance is $\pm$ 5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.


LUMINOUS INTENSITY DISTRIBUTION

8w


子午面配光曲线




最大光强分布曲线



光谱曲线图

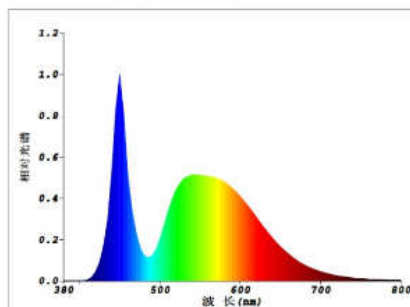

色容差图





INSTALLATION

- Switch off electricity
- Remove the conventional lamp
- Remove the starter and ballast
- Install the retrofit version starter into the starter holder
- Install retrofit version LED lamp into the lamp holder
- Secure position by turning the lamp by 90°

ILLUSTRATION:

Double ended power supply:

Take off fluorescent lamps

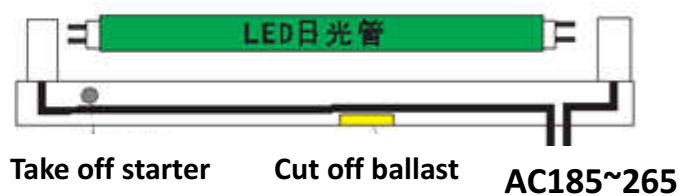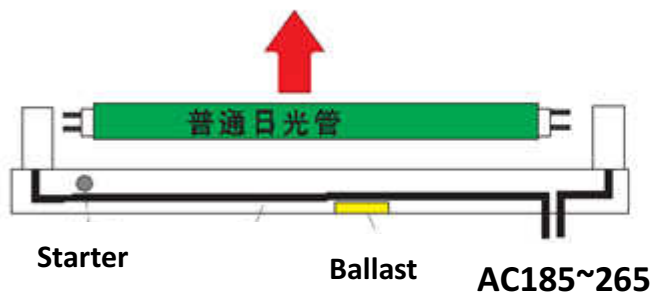

Single ended power supply:

Take off fluorescent lamps

