




LED T8 Glass Tube (16W)



Module	Dimension
T8-1200mm	LxD=1198x25.8 mm

Specification





Model No.	LOM-T8C1612F7-G	LOM-T8N1612F7-G	LOM-T8W1612F7-G
Input Voltage	AC 185 ~ 265V	AC 185 ~ 265V	AC 185 ~ 265V
Rated Power	16 W $\pm$ 10%	16 W $\pm$ 10%	16 W $\pm$ 10%
Total Lumens	1600lm	1440 lm	1440 lm
Lumens Efficiency	100lm/W	90 lm/W	90 lm/W
Color Temp.	6500 $\pm$ 500 K	4000 $\pm$ 500K	3000 $\pm$ 500K
CRI	≥ 70	≥ 70	≥ 70
Power Factor	>0.5	>0.5	>0.5
Base	G13	G13	G13
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Beam Angle	320° $\pm$ 10%	320° $\pm$ 10%	320° $\pm$ 10%
Life Time	20000 hrs	20000 hrs	20000 hrs
Dimensions	1198 * 25.8 mm	1198 *25.8 mm	1198 * 25.8 mm
Weight	210 $\pm$ 20 g	210 $\pm$ 20 g	210 $\pm$ 20 g
Lens Type	Foggy	Foggy	Foggy

Remarks

- 1.The tolerance of luminous flux is $\pm 10\%$.
2. The dimension tolerance is $\pm 5\text{mm}$.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

LUMINOUS INTENSITY DISTRIBUTION

16w

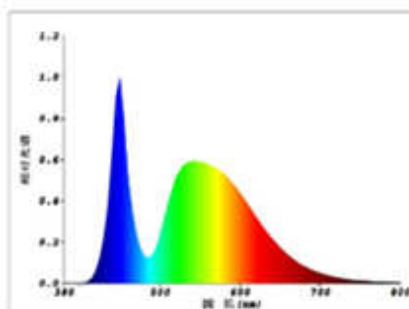



INSTALLATION

- Switch off electricity
- Remove the conventional lamp
- Remove the starter and ballast
- Install the retrofit version starter into the starter holder
- Install retrofit version LED lamp into the lamp holder
- Secure position by turning the lamp by 90°

ILLUSTRATION:

Double ended power supply:

Take off fluorescent lamps

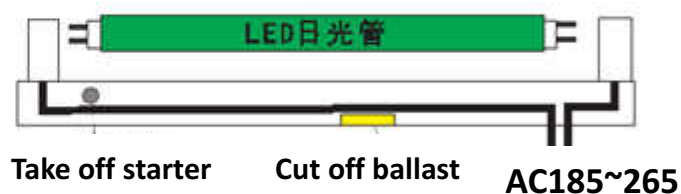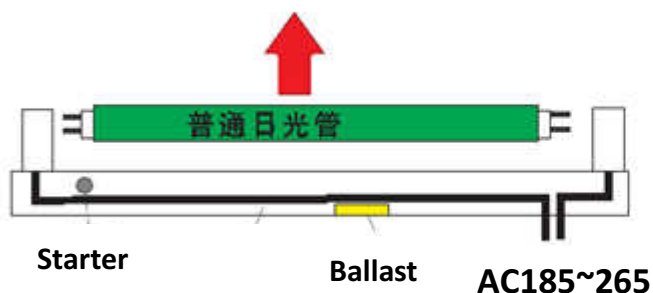

Single ended power supply:

Take off fluorescent lamps

