




LED TUNNEL LIGHT SPECIFICATION


Model No.	L81-L3.1-1-060-RNIPPX04265-A
Input Voltage	AC 120~277(Vac)
Frequency	47-63(Hz)
LED Qty	42(pcs)
Rated Power	60±10%(W)
Lumens per Watt (Efficacy)	100(lm/W)
E_{max}	(Height= 6m): ≥ 34 lx
	(Height= 8m): ≥ 19 lx
U_O	(Height= 5.5m): ≥ 0.40
U_L	(Height= 5.5m): ≥ 0.60
Color Temp.(CCT)	4000K±285K
CRI	Ra>70
Power Factor	>0.95
Operating Ambient Temp.	-40°C~50°C
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40°C~80°C
Life time(L70)	≥ 50000 (HR)
Architecture	Aluminum Base & tempered glass
Dimensions (mm)	366(L)*284.6(W)*207(H)
Weight	7.7±0.2(kg)
Waterproof	IP65

60W LED Tunnel Light


60W 5~10m Illuminance Distribution Plot

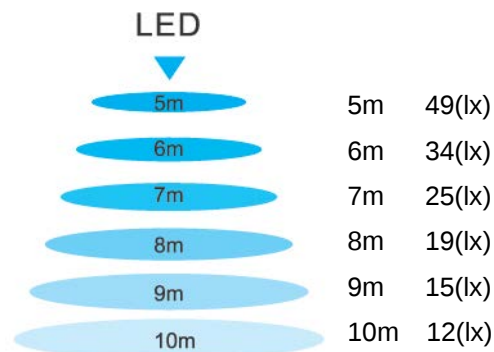

60W Distribution Plot

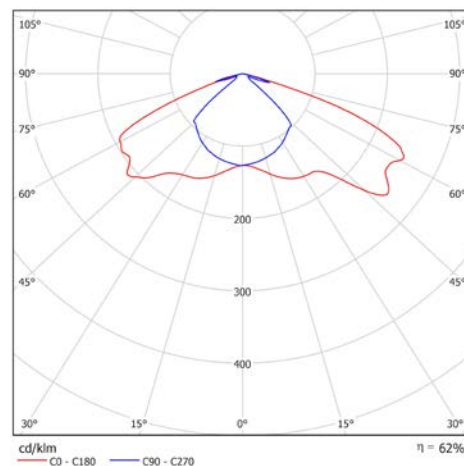

Outline Dimensions

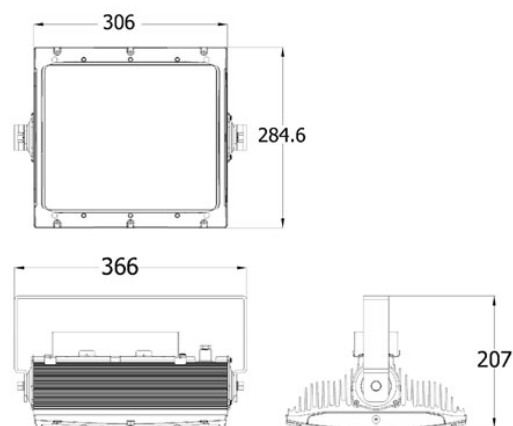

Remarks

- 1.The tolerance of luminous flux is $\pm 10\%$.
2. The dimension tolerance is ± 5 mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

