




LED Explosion-proof Lamp Specification


Model No.	LD1-G000-2-030-CNIOOC00102-A
Input Voltage	90~277(Vac)
Frequency	47-63 (Hz)
LED Qty	1PCS
Rated Power	30±10% (W)
LED Nominal Flux(lm)	≥ 1950(Lm)
Luminaire Per Watt (Efficiency)	≥ 65(Lm/ W)
E _{max}	(Height= 6m): ≥ 10.88(Lx)
	(Height= 8m): ≥ 6.12(Lx)
Color Temp.(CCT)	5000K
CRI	Ra>70
Power Factor	PF >0.9
Operating Ambient Temp.	-30℃~50℃
Operating Ambient Humidity	10%~90% (RH)
Store Temp.	-40℃~80℃
Life time(L70)	≥ 50000(hrs)
Architecture	Aluminum Base & tempered glass
Dimensions (mm)	150(L)*130(W)*180(H)
Weight	2.0±0.5 (kg)
Waterproof	IP65

30W LED Explosion-proof Lamp


30W 2~7m Illuminance Distribution Plot

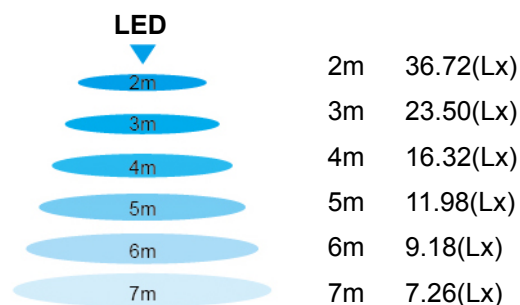

30W Distribution Plot

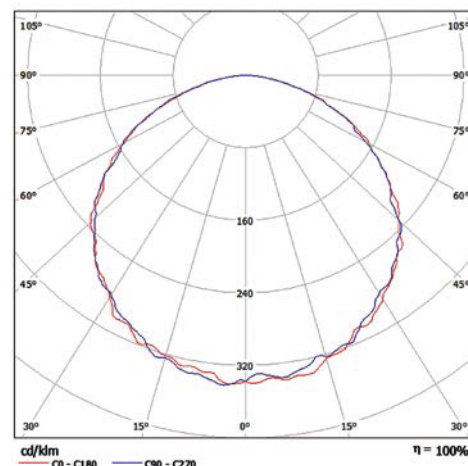

Outline Dimensions

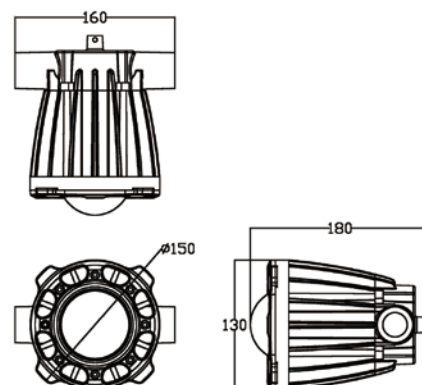

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.