




### LED STREETLIGHT SPECIFICATION


Model No.	L15-LK.4-1-040-CCISAB01805-A
Input Voltage	230Vac (180-240V)
Frequency	47-63(Hz)
LED Qty	18(pcs)
Rated Power	40±10% (W)
Lumens per Watt (Efficacy)	95(lm/W)
Usable lumens(Lm)	3800(lm)
E <sub>max</sub>	(Height= 6m): ≥ 20.9(lx)
	(Height= 9m): ≥ 9.5(lx)
U <sub>O</sub>	(Height= 6m): ≥ 0.40
U <sub>L</sub>	(Height= 6m): ≥ 0.60
Color Temp.(CCT)	5000K-6500K
Power Factor	>0.95
CRI	Ra>70
Total Harmonic	<15%
Operating Ambient Temp.	-40℃~50℃
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40℃~80℃
Life time	≥ 50000(Hrs)
Architecture	Aluminum Die- Casting & tempered glass
Dimensions (mm)	530(L)*252(W)*90(H)
Weight	5±0.2(kg)
Waterproof	IP65

## 40W LED Streetlight


### 40W 4~9m Illuminance Distribution Plot

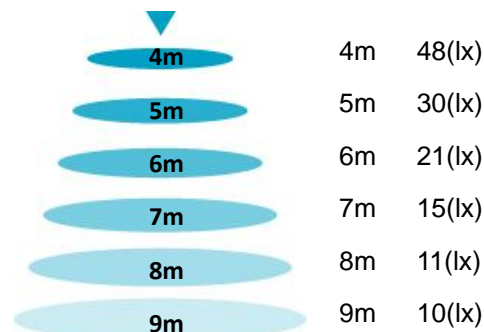

### 40W Distribution Plot

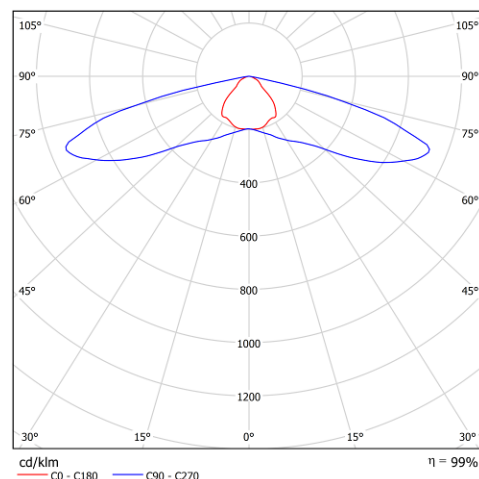

### Outline Dimensions

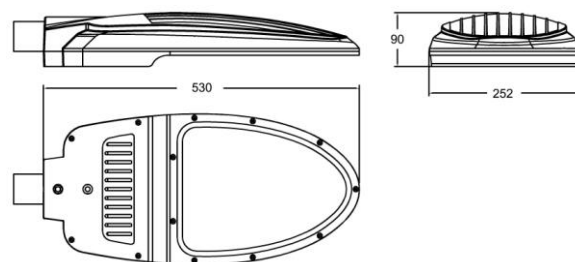

#### Remarks

1. The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.



TIS.1955-2551

