




LED Ceiling Light (12W)

Dimension:

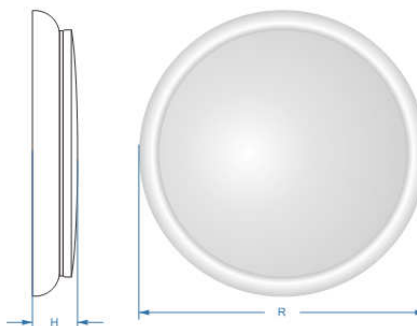

R: ϕ 350mm*H:65mm

SPECIFICATION

Model No.	LOM-CLCA12F8	LOM-CLWA12F8
Input Voltage	100 ~ 240V	100 ~ 240V
Rated Power	12 W $\pm$ 10%	12 W $\pm$ 10%
Usable lumens	1200 lm	1140 lm
Lumens per Watt	100 lm/W	95 lm/W
Color Temp.	6000 $\pm$ 500 K	3000 $\pm$ 500 K
CRI	80	80
Power Factor	>0.7	>0.7
Beam Angle	120° $\pm$ 10%	120° $\pm$ 10%
Life time	30000 hrs	30000 hrs
Dimensions	ϕ 350X 65mm	ϕ 350X 65mm
Weight	930 $\pm$ 20g	930 $\pm$ 20g
Operating Temp.	-25°C~40°C	-25°C~40°C
Lens	Foggy	Foggy

Remarks

1. The tolerance of luminous flux is $\pm$ 10%.



2. The dimension tolerance is $\pm$ 5mm.

3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.


Laster Tech Corporation LTD. Building F No.4, Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION

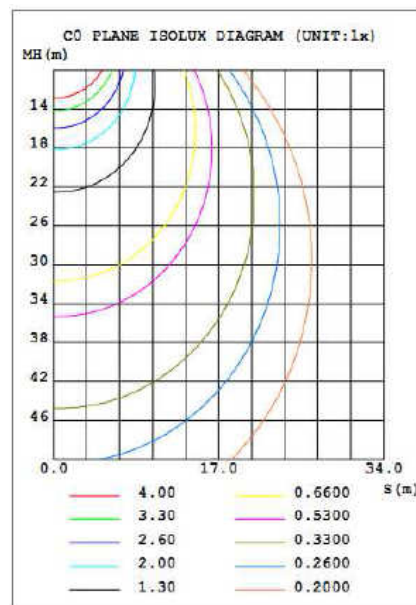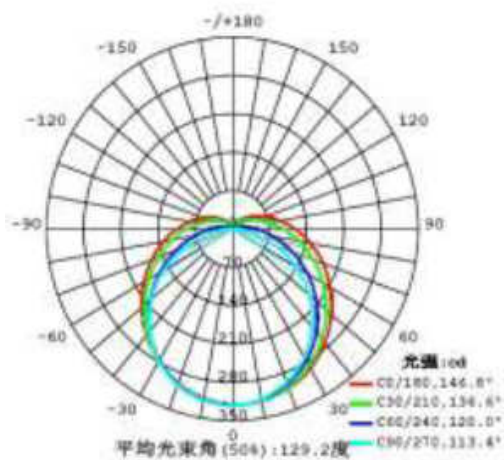

Installation Instruction

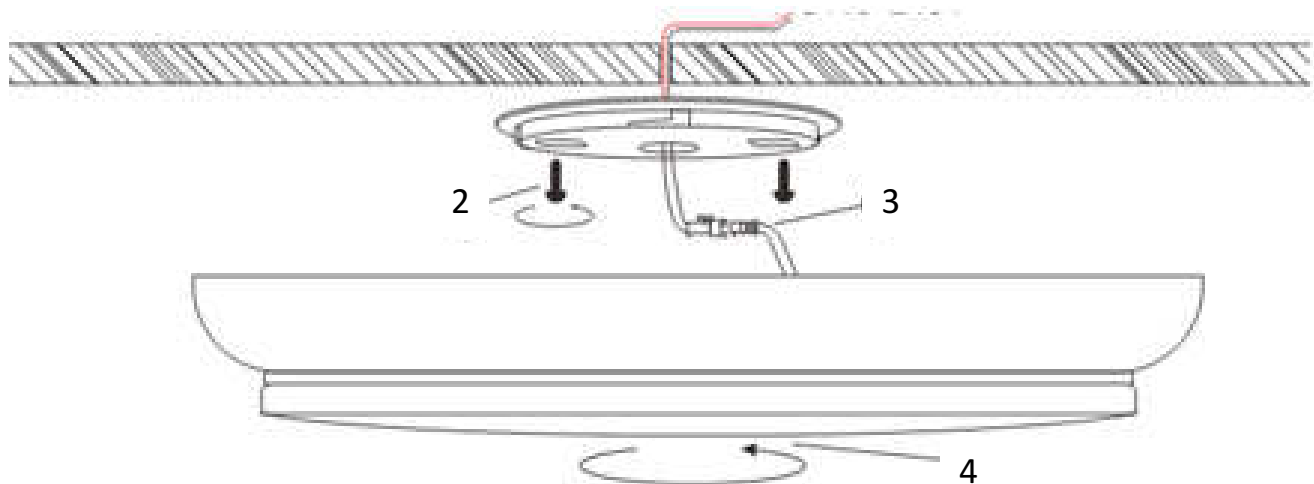

1. Turn off the power
2. Please fix the base on the stable and fixed ceiling, or it will fall or damage.
3. Please connect the input power carefully, incorrect connection will cause fire accident.
4. Keep the lamp body card slot match base card buckle, rotate from left to right, can be easily installed.
5. Please confirm if it installs correctly, then turn on.