


LOJ-F1 LED Projector Light

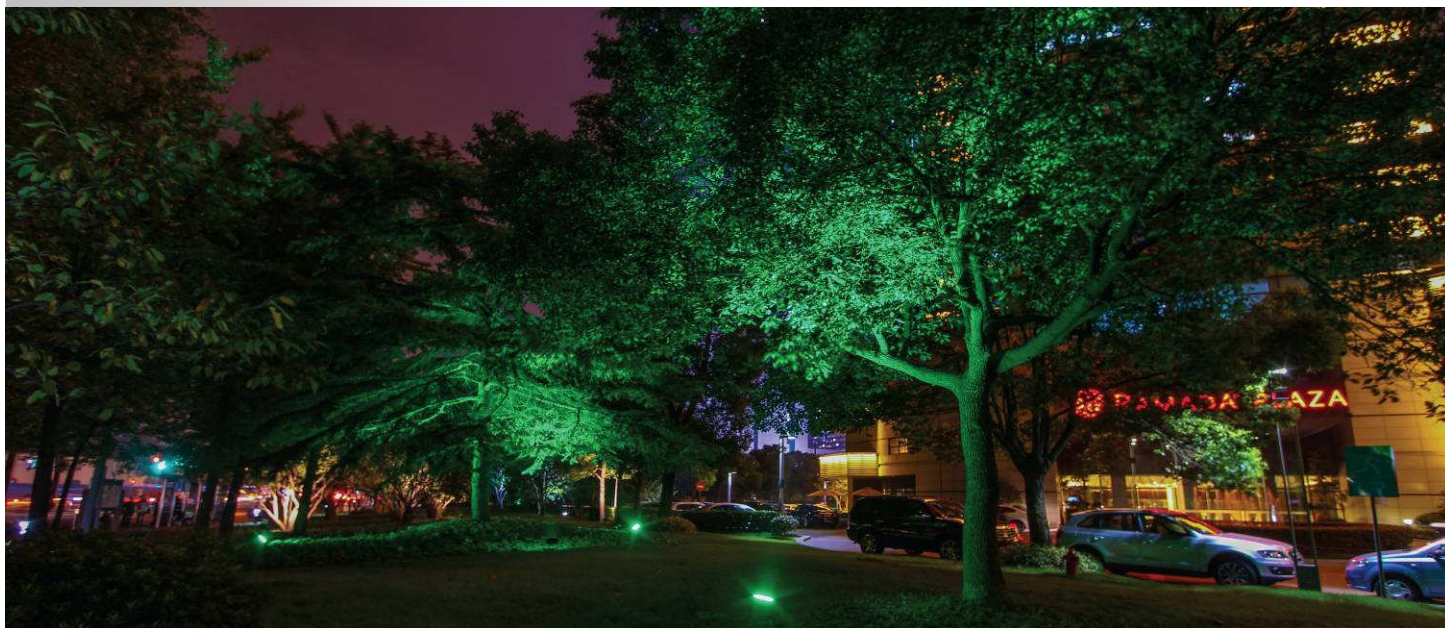

Specification :

Model No.	LOJ-F1-18-xxxxx	LOJ-F1-36-xxxxx	LOJ-F1-54-xxxxx	LOJ-F1-72-xxxxx
Input Voltage	AC 100~277(Vac)			
Frequency	50/60(Hz)			
LED Qty	18(pcs)	36(pcs)	54(pcs)	72(pcs)
Rated Power	23W	45W	67W	89W
Luminous Flux(Single/RGB)	1687(lm)/871(lm)	3272(lm)/1649(lm)	4968(lm)/2457(lm)	6878(lm)/3263(lm)
Color Temp.(CCT)	Single/RGB			
Operating Ambient Temp.	-35℃~50℃			
Operating Ambient Humidity	10%~90%(RH)			
Life time(L70)	≥ 50000(HR)			
Dimensions (mm)	270(L)*335(W) *188(H)	320(L)*346(W) *188(H)	390(L)*364(W) *188(H)	
Control Mode	CC/DMX512			
Weight	3.1±0.5(kg)	3.5±0.5(kg)	5.857±0.5(kg)	
Waterproof	IP66			
Beam Angle	10 ° ,25 ° 40 ° ,60 ° ,25x60 °			

Remarks

- 1".xx" in Model No. represents different lighting distributions (10 / 25 / 40 / 60 / 25x60), please refer to Distribution Plot in next page for more details
- 2.The Luminous Flux above is calculated based on 10 degree beam angle.
- 3..The tolerance of luminous flux is ±10%.
- 4.The dimension tolerance is ±5mm.
- 5.The appearance and specifications of the product may be modified for improvement without notice.
- 6.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.1

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196



Product Photo:



LOJ-F1-18-xxxxx

LOJ-F1-36-xxxxx

LOJ-F1-54-xxxxx


LOJ-F1-72-xxxxx

Function Directions:



360° rotate bracket

Dimension:




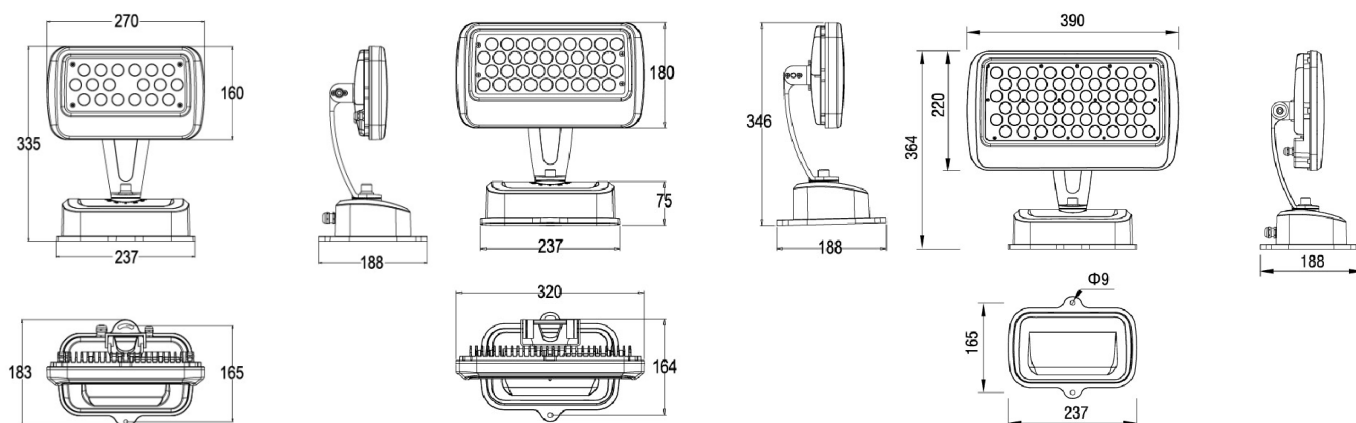


LOJ-F1-18-xxxxx

LOJ-F1-36-xxxxx

LOJ-F1-54-xxxxx/LOJ-F1-72-xxxxx

Distribution Plot:

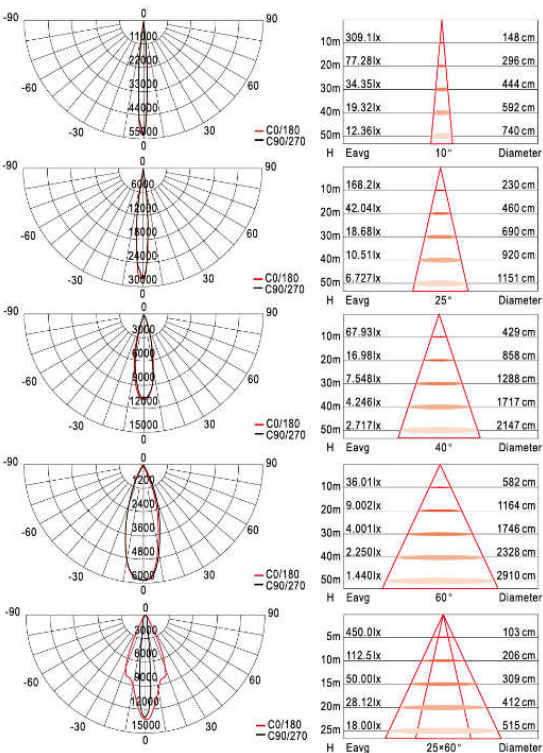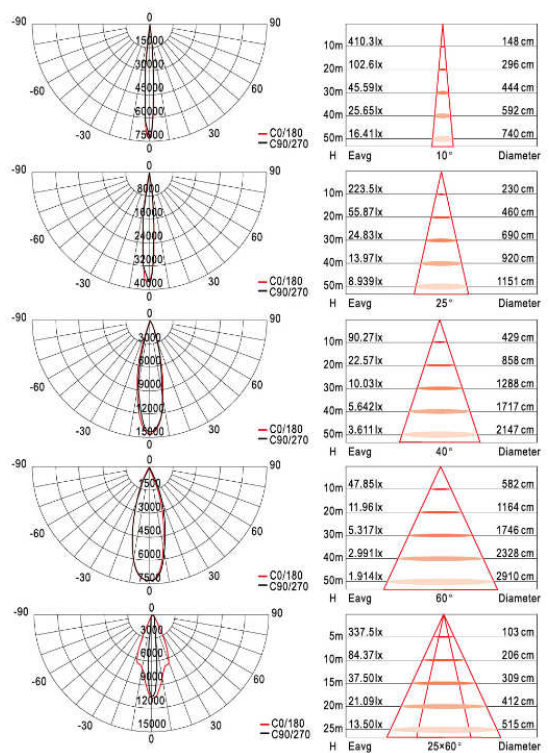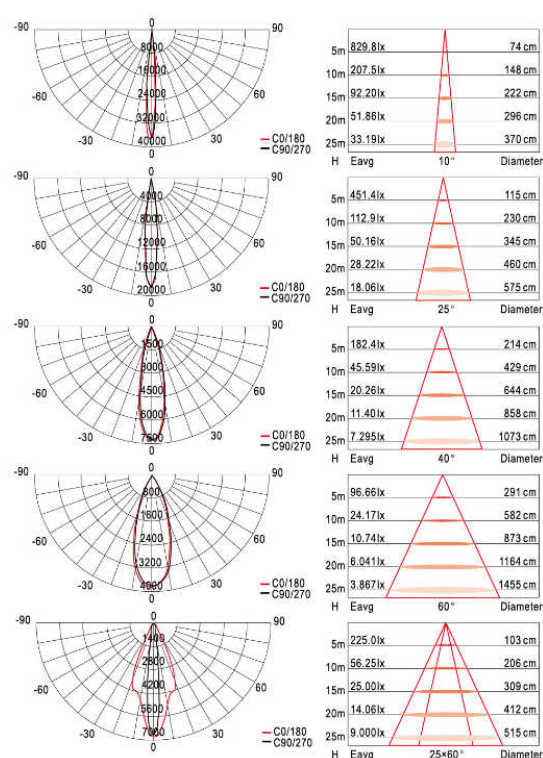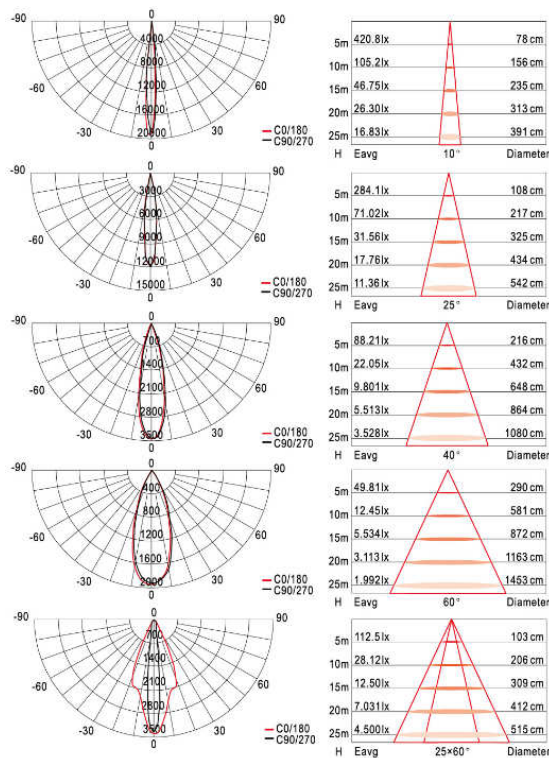

LOJ-F1-54-xxxxx

LOJ-F1-72-xxxxx