

LOB-TH60W LED High Bay Light(High Lumen)



Specification :

Model No.	LOB-TH060W-xx (98)	LOB-TH060W-xx (98)+AL-60D	LOB-TH060W-xx (98)+AL-90D	LOB-TH060W-xx (98)+PC-70D
Input Voltage	AC 100~265(Vac)			
Frequency	50/60(Hz)			
LED Q'ty	98(pcs)			
Rated Power	60±10%(W)			
Luminous Flux(5000K)	7500(lm)	6600(lm)	6670(lm)	6820(lm)
Color Temp.(CCT)	3000/4000/5000/5700K			
CRI	80			
Power Factor	>0.95			
Operating Ambient Temp.	-35℃~50℃			
Architecture	Aluminum Base + PC			
Dimensions (mm)	310(Dia)*318(H)			
Weight	1.9±0.5(kg)	2.3±0.5(kg)	2.3±0.5(kg)	2.4±0.5(kg)
Life Time	40000hrs at 50℃ ambient temperature			
Waterproof	IP65			
Beam Angle	110°	55°	85°	70°

Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Product Photo:



LOB-TH060W-xx(98)



LOB-TH060W-xx(98)+AL-60D




LOB-TH060W-xx(98)+AL-90D




LOB-TH060W-xx(98)+PC-70D


Dimension:

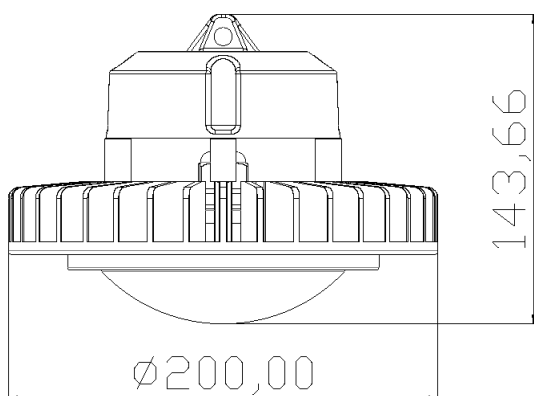


LOB-TH060W-xx(98)

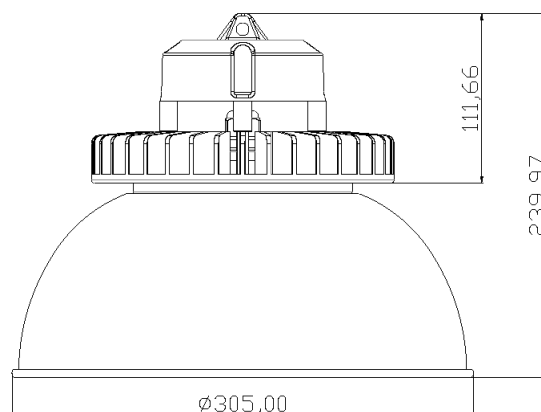

LOB-TH060W-xx(98)+AL-60D

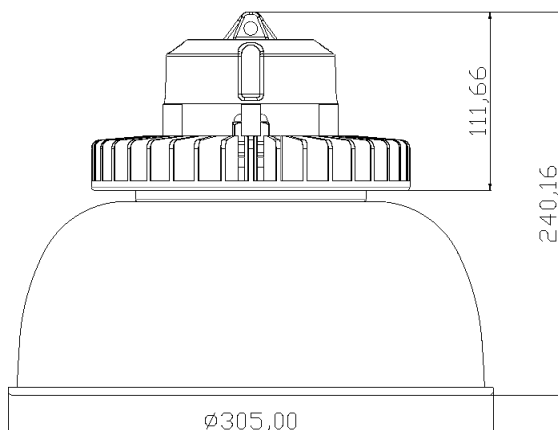


LOB-TH060W-xx(98)+AL-90D

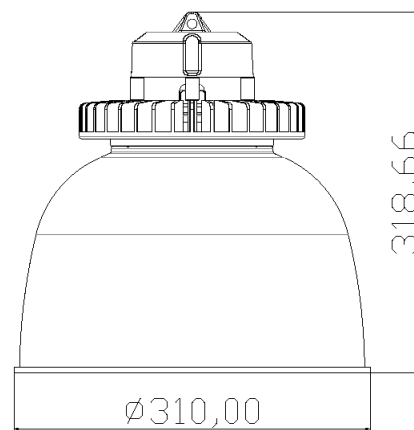


LOB-TH060W-xx(98)+PC-70D

Light Distribution Curve

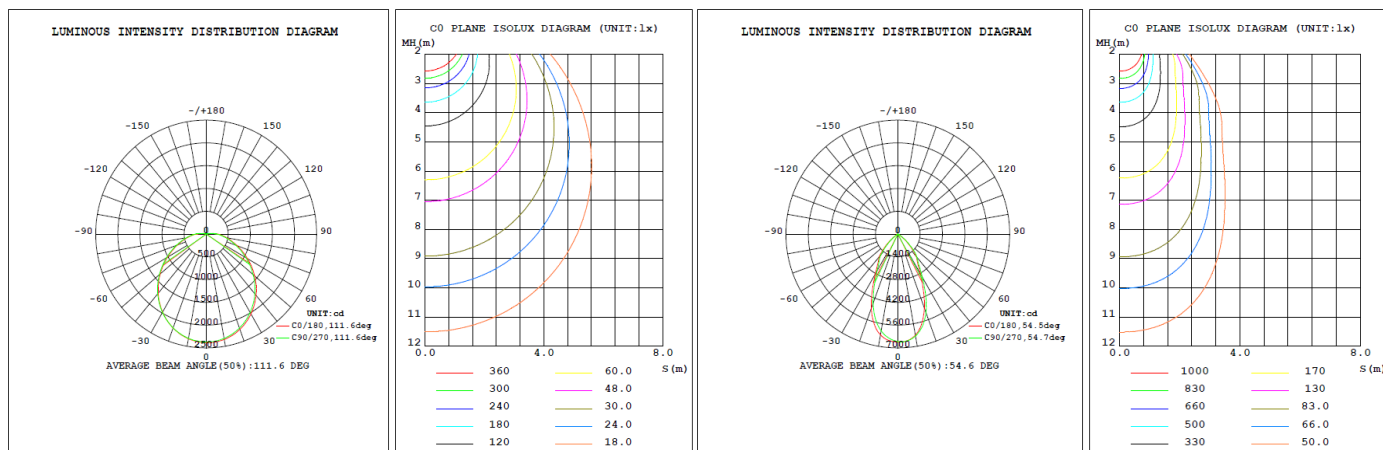

LOB-TH060W-xx(98)

LOB-TH060W-xx(98)+AL-60D

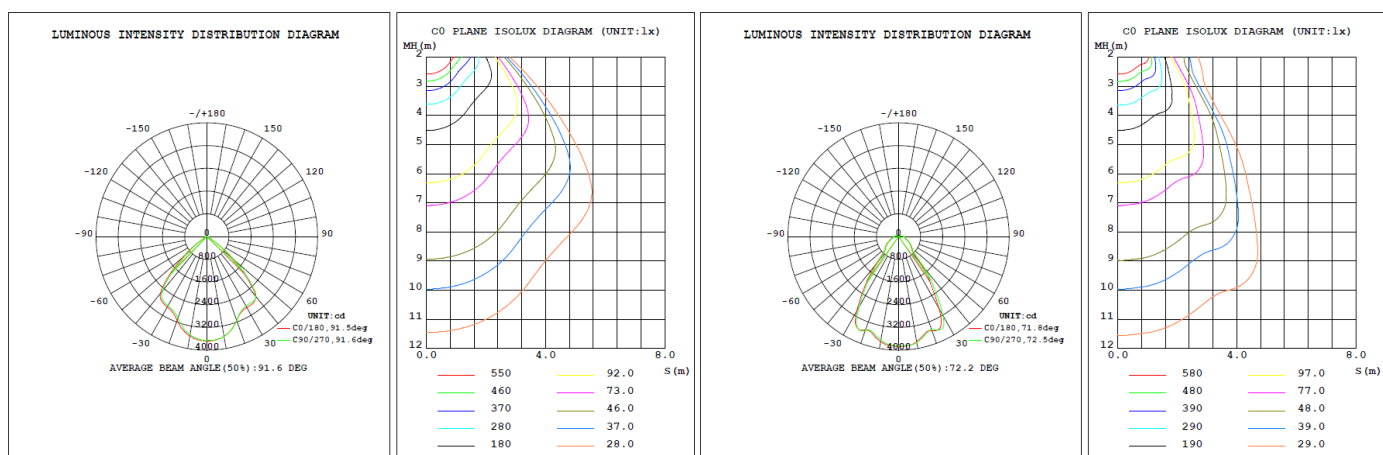

LOB-TH060W-xx(98)+AL-90D

LOB-TH060W-xx(98)+PC-70D

Installation:

