


HWFR-B310 HWFR-B410 HWFR-B510

Lumileds P3 Series TS AllnGaP Chips

Technical Data DS31

P3 Series transparent substrate AllnGaP chips deliver high flux performance.

Outline Drawings

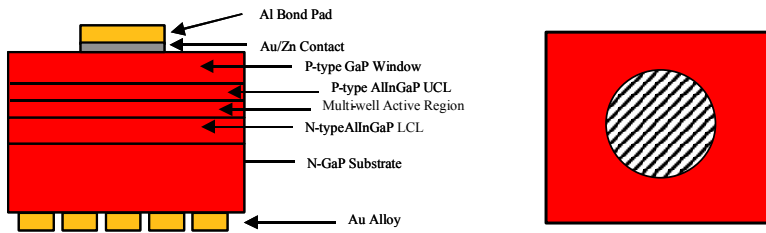

Optical Characteristics at T=25°C [See notes 1, 2, and 3]

PART NUMBER	COLOR	DOMINANT WAVELENGTH @5mA (λ _D , nm)			INTENSITY @20mA (I _v , mcd)		FLUX @20mA (mIm/A)
		MIN.	TYP.	MAX.	MIN.	MAX.	TYP.
HWFR-B310 #101	AMBER	584	-	595	70	90	-
HWFR-B310 #102	AMBER	584	-	595	90	-	-
HWFR-B310 #112	AMBER	584	590.5	595	70, 60%MIN	>90	55
HWFR-B410 #102	RED/ORANGE	612	-	625	100	-	-
HWFR-B510 #101	RED	624	-	635	70	100	-
HWFR-B510 #102	RED	624	-	635	100	-	-
HWFR-B510 #112	RED	624	629	635	70, 60%MIN	>100	70

Electrical Characteristics at T=25°C [See notes 1 and 3]

PART NUMBER	COLOR	REVERSE VOLTAGE @ 100μA (V _R , V)	FORWARD VOLTAGE @20mA (V _F , V)		
		MIN	MIN.	TYP.	MAX.
HWFR-B310	AMBER	-6.0	2.0	2.35	2.6
HWFR-B410	RED/ORANGE	-6.0	2.0	2.25	2.6
HWFR-B510	RED	-6.0	2.0	2.25	2.6

Visual Inspection and Testing [See note 1]

VISUAL INSPECTION	100%
V _F & V _R TESTING	100%
IV TESTING	SAMPLE
LAMBDA TESTING	SAMPLE

Nominal Mechanical Specifications

CHIP SIZE (MILS)	8.6 X 8.6
CHIP HEIGHT (MILS)	10.5 +/- 1.5 MILS
JUNCTION AREA (SQ. MILS)	74
TOP METAL	AL/AU ZN
BACK METAL	AU/GE
CHIP PRESENTATION [SEE NOTE 4]	

Benefits

- Fewer LEDs Required
- Lowers Lighting System Cost

Features

- High Luminous Flux
- Higher Forward Current Operation Capability

Typical Applications

- Signs/Signals
- Machine Vision
- Automotive Lighting
- Illumination

Notes:

1. I_v and lambda values are based on a 21 die sample. V_f and V_r are 100% tested.
2. Flux measurements were made using 5mm LED lamp packages encapsulated with epoxy and are for information only.
3. Typical values given are the average values expected and are for information only.
4. Chips are mounted on 6 inch diameter

Company Information

Lumileds is a world-class supplier of Light Emitting Diodes (LEDs) producing billions of LEDs annually. Lumileds is a fully integrated supplier, producing core LED material in all three base colors (Red, Green, Blue) and White. Lumileds has R&D development centers in San Jose, California and Best, The Netherlands. Production capabilities in San Jose, California and Malaysia.

Lumileds is pioneering the high-flux LED technology and bridging the gap between solid-state LED technology and the lighting world. Lumileds is absolutely dedicated to bringing the best and brightest LED technology to enable new applications and markets in the Lighting world.



©2003 Lumileds Lighting, US, LLC. All rights reserved. Luxeon is a trademark of Lumileds Lighting. Product specifications are subject to change without notice.

DOCUMENT #: DS3 I (07/03)

Lumileds may make process or materials changes affecting the performance or other characteristics of our products. These products supplied after such changes will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.

LUMILEDS

www.luxeon.com
www.lumileds.com

For technical assistance or the location of your nearest Lumileds sales office, call:

Worldwide:
+1 408-435-6044
US Toll free: 877-298-9455
Europe: +31 499 339 439
Fax: 408-435-6855
Email us at info@lumileds.com

Lumileds Lighting, LLC
370 West Trimble Road
San Jose, CA 95131