




LED STREETLIGHT SPECIFICATION


Model No.	L13-LS12-1-200-RNIPPX09665-A
Input Voltage	AC 120~277(Vac)
Frequency	47-63(Hz)
LED Qty	96(pcs)
Rated Power	200±10%(W)
Lumens per Watt (Efficacy)	95(lm/W)
E _{max}	(Height = 8m): ≥86Lx
	(Height = 10m): ≥54Lx
U _O	(Height = 8m): ≥0.40
U _L	(Height = 8m): ≥0.60
Color Temp.(CCT)	4000K-5000K
CRI	Ra>70
Power Factor	>0.9
Operating Ambient Temp.	-40℃~50℃
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40℃~80℃
Life time(L70)	≥ 50000(HR)
Architecture	Aluminum Pressure-casting & PC
Dimensions (mm)	819(L)*377(W)*205(H)
Weight	16±0.2(kg)
Waterproof	IP65

200W LED Streetlight


200W 7~12m Illuminance Distribution Plot

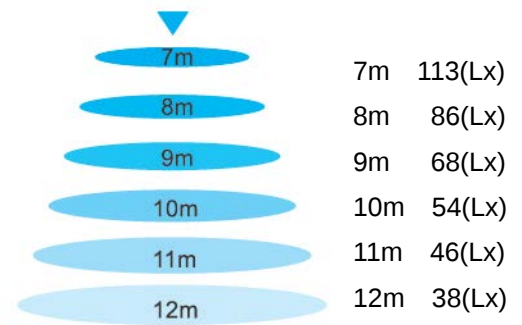

200W Distribution Plot

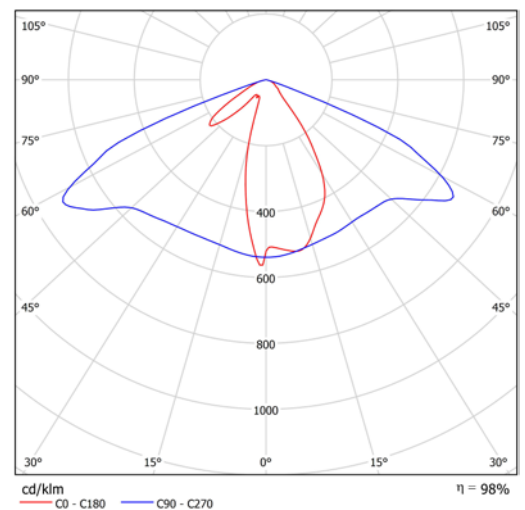

Outline Dimensions

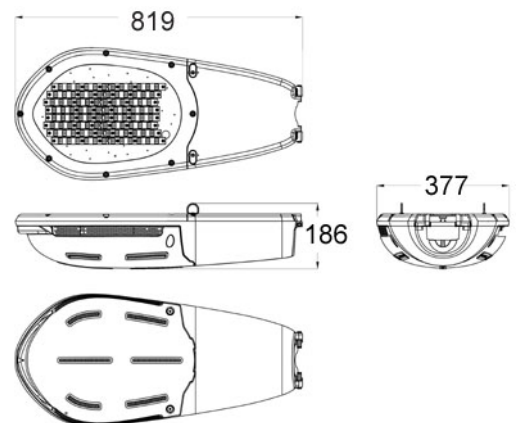

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.