





## LED Fully Illuminated Bulb (6W)

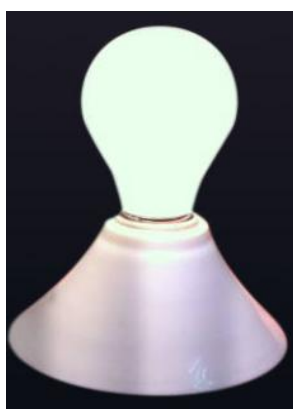

Dimension:

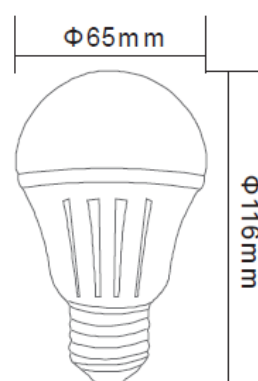

### Specification

| Model No.         | LOM-A19CS6F8  | LOM-A19WS6F8  |
|-------------------|---------------|---------------|
| Input Voltage     | AC 110/220V   | AC 110/220V   |
| Rated Power       | 6W±10%        | 6W±10%        |
| Total Lumens      | 510 lm        | 480 lm        |
| Lumens Efficiency | 85 lm/W       | 80 lm/W       |
| Color Temp.       | 6500±500 K    | 3000 ±500K    |
| CRI               | 80            | 80            |
| Power Factor      | >0.5          | >0.5          |
| Base              | E27           | E27           |
| Beam Angle(10%)   | 360°          | 360°          |
| Operating Temp.   | -25°C~40°C    | -25°C~40°C    |
| Life time         | ≥40000 hrs    | ≥ 40000 hrs   |
| Dimensions        | ψ 65 X 116 mm | ψ 65 X 116 mm |
| Weight            | 75± 20 g      | 75 ± 20 g     |




#### Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.2

[www.sweeo.com](http://www.sweeo.com) TEL:+886-2-22226112 FAX:+886-2-22226196


## LUMINOUS INTENSITY DISTRIBUTION

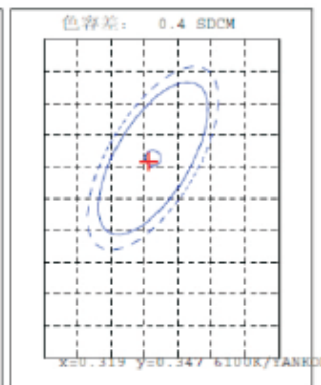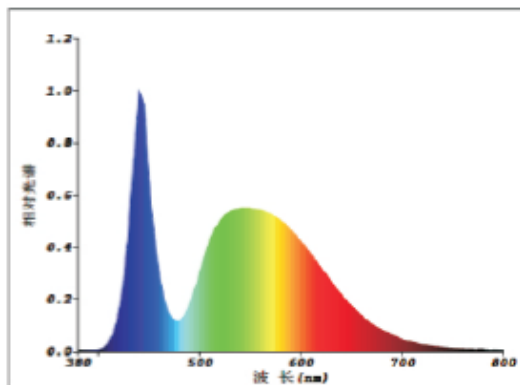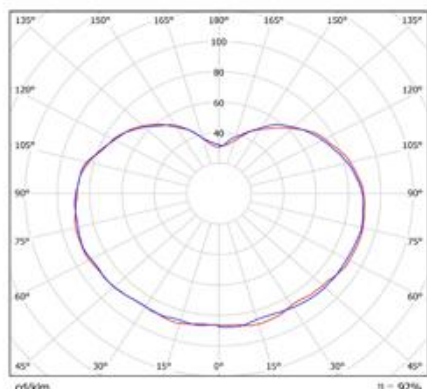

## PACKAGE DRAWING

**Dimensions :**

**Box :68\*68\*120mm**

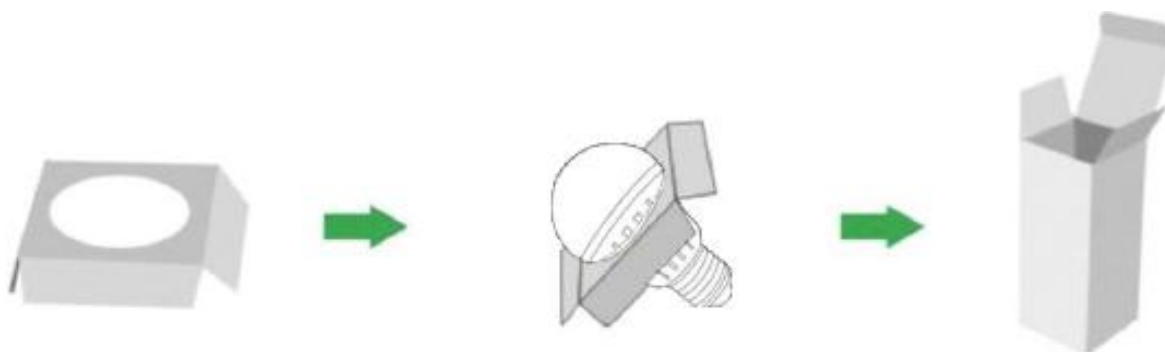

**Carton:520\*325\*325mm**

**Package: one bulb in an inner box, one master carton contain 100 inner boxes.**

