





LED Dimmable MR16 (7W)

Dimension:

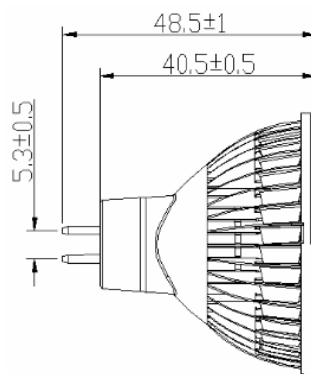

Specification

Model No.	LOM-MR16C7AX-DM	LOM-MR16N7AX-DM	LOM-MR16W7AX-DM
Input Voltage	12V DC/AC	12V DC/AC	12V DC/AC
Rated Power	7 W $\pm$ 10%	7W $\pm$ 10%	7W $\pm$ 10%
Total Lumens	560 lm	490 lm	490 lm
Lumens Efficiency	80 lm/W	70 lm/W	70 lm/W
Color Temp.	6000 $\pm$ 500K	4000 $\pm$ 500K	3000 $\pm$ 500K
CRI	80	80	80
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Base	GU5.3	GU5.3	GU5.3
Life Time	$\geq$ 30000 hrs	$\geq$ 30000 hrs	$\geq$ 30000 hrs
Beam angle	A1:30°/A2:45°	A1:30°/A2:45°	A1:30°/A2:45°
Dimensions	49.5(D) X 48.5(H) mm	49.5(D) X 48.5(H) mm	49.5(D) X 48.5(H) mm
Weight(whit drive)	88 $\pm$ 20g	88 $\pm$ 20g	88 $\pm$ 20g

Remarks

1. The tolerance of luminous flux is $\pm$ 10%.
2. The dimension tolerance is $\pm$ 5mm.
3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.


Illuminance at Distance

30° Lens :Clear


30° Lens :Foggy

45° Lens :Clear

45° Lens :Foggy

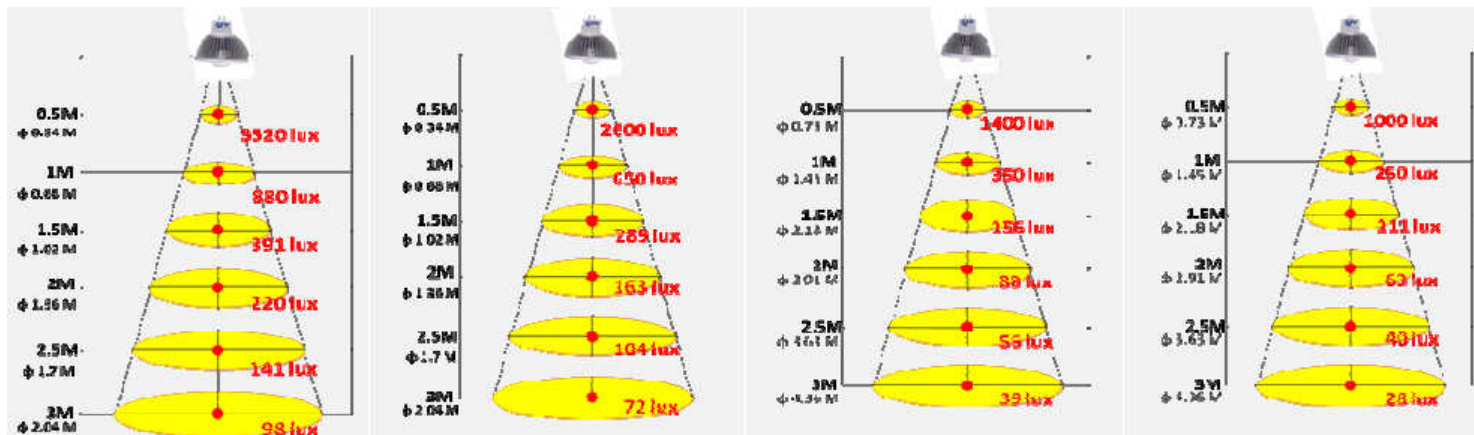

Wiring Diagram (For Dimming)

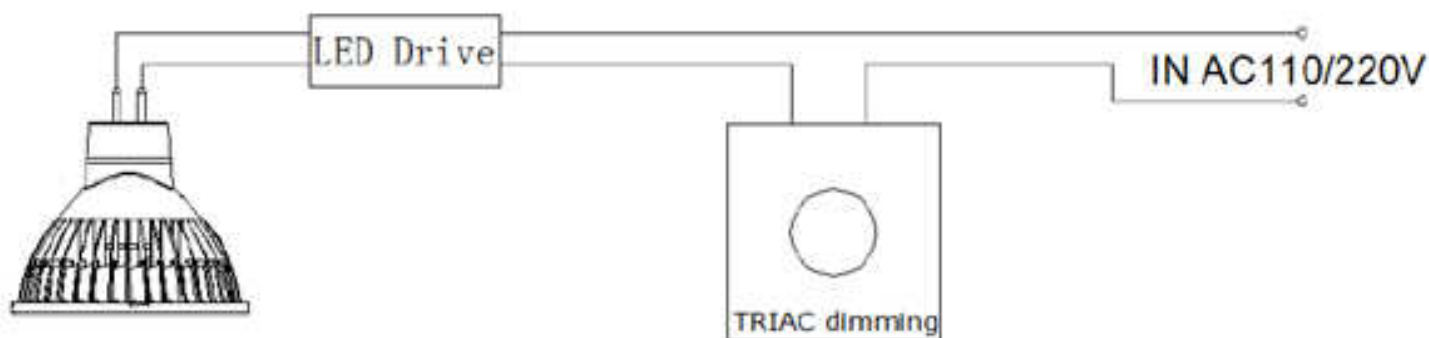

Package

1.Single Unit:

2.Carton:200pcs Unit Boxes

