




LED BULB (9W)



Dimension:

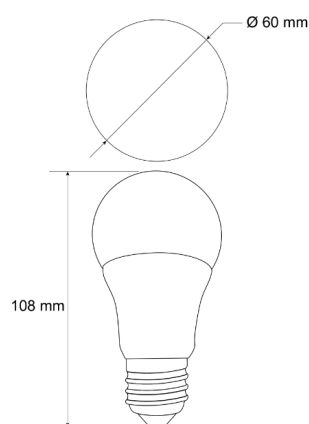

Model No.	LOE-A19C928	LOE-A19N928	LOE-A19W928
Input Voltage	AC220~240(vac)	AC220~240 (vac)	AC220~240 (vac)
Frequency	50/60Hz	50/60Hz	50/60Hz
Rated Power	9 W±10%	9W±10%	9W±10%
Lumens Flux	750lm	700 lm	700 lm
Color Temp.	6500±500K	4000±500K	3000±500K
CRI	80	80	80
Operating Temp.	-25℃~40℃	-25℃~40℃	-25℃~40℃
Base	E27	E27	E27
Life Time	20000 hrs	20000 hrs	20000 hrs
Beam angle	190°	190°	190°
Dimensions	Ø60 *(H)108 mm	Ø60 *(H)108 mm	Ø60 *(H)108 mm
Weight	65±20 g	65±20 g	65±20 g
Material/Lens	PC/Milky Cover	PC/Milky Cover	PC/Milky Cover


Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.1

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION

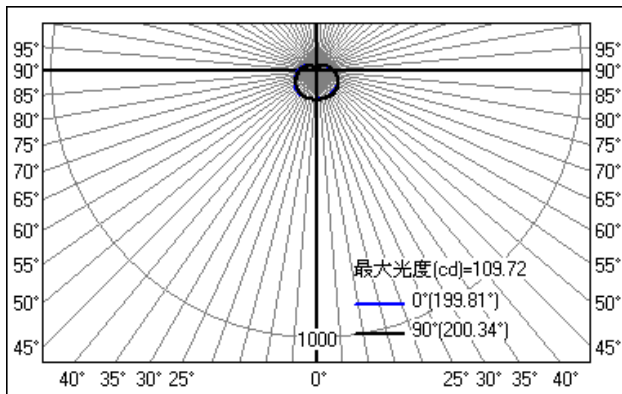


Lux at a Distance	
1 m	108 lx
2 m	27 lx
3 m	12 lx
4 m	7 lx
5 m	4 lx
6 m	3 lx
7 m	2 lx
8 m	2 lx
9 m	1 lx
10 m	1 lx
Vert. Spread: 200.3 deg. Horiz. Spread: 199.8 de	

PACKAGE DRAWING

Dimensions :

Box :68*68*120mm,

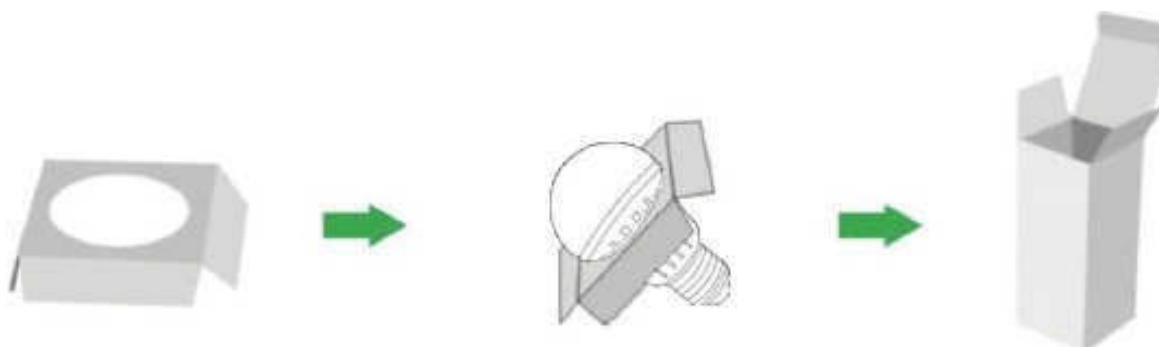

Carton:520*325*325mm

Package: one bulb in an inner box, one master carton contain 100 inner boxes.

