

LOJ-A9-90A LED Street Light



Product Specification

Model No.	LOJ-A9-90A-Cxxxx	LOJ-A9-90A-Nxxxx	LOJ-A9-90A-Wxxxx
Input Voltage	AC 100~277(Vac)		
Frequency	50/60(Hz)		
LED Qty	54(pcs)		
Rated Power	88±10%(W)		
Luminous Flux	10010(lm)	9270(lm)	8530(lm)
Color Temp.(CCT)	6500K±500K	4000K±500K	3000K±500K
CRI	Ra>70		
Power Factor	>0.9		
Operating Ambient Temp.	-35℃~50℃		
Operating Ambient Humidity	20%~90%(RH)		
Life time(L70)	≥ 50000(HR)		
Architecture	Aluminum Base		
Dimensions (mm)	754.8(L)*500(W)*160.5(H)		
Weight	11.30±0.5(kg)		
Waterproof	IP66		

Remarks

- 1".xxxx" in Model No. represents different lighting distributions (TS-1 / T2-1 / T3-1), please refer to Distribution Plot in next page for more details
- 2.The tolerance of luminous flux is ±10%.
- 3.The dimension tolerance is ±5mm.
- 4.The appearance and specifications of the product may be modified for improvement without notice.
- 5.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0


www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196




Product Photo



Product Dimension

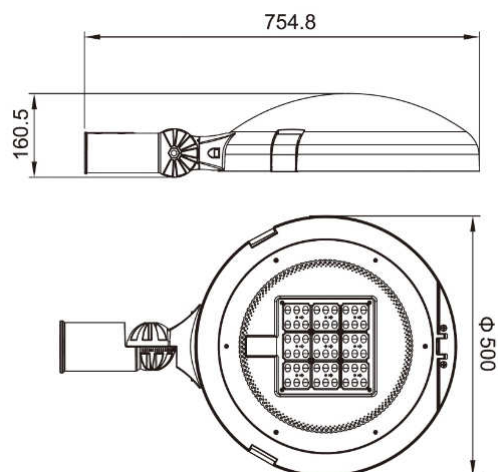

Photocell(optional)

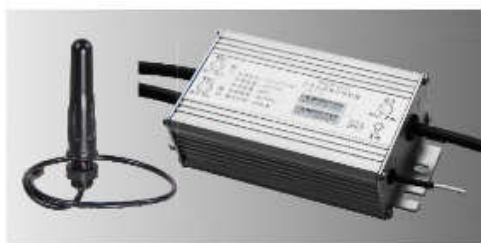


Wireless single lamp controller(optional)




Surge protector(optional)

Distribution Plot

TS-1

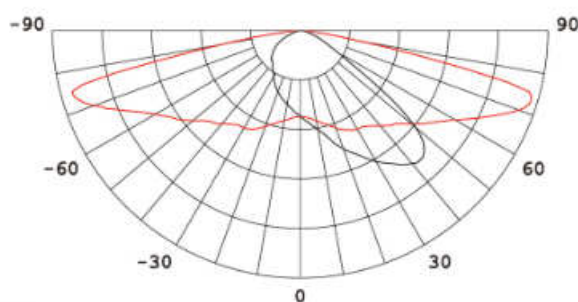

T2-1

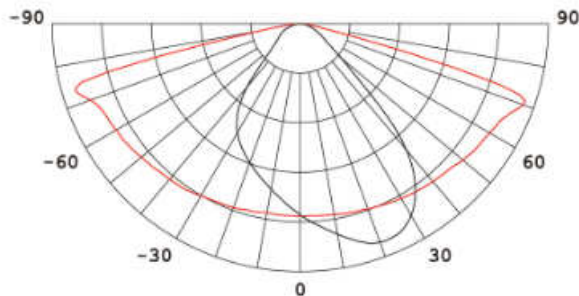

T3-1

