




LED T8 Batten Tube (4ft)

Dimension:

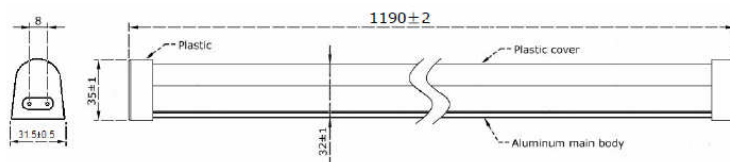

Module	Dimension
T8-4ft	LxD=1190x35mm

Specification


Model No.	LOM-T8C1812F8-B	LOM-T8N1812F8-B	LOM-T8W1812F8-B
Input Voltage	AC 100 ~ 240V	AC 100 ~ 240V	AC100~240V
Rated Power	18W±10%	18W±10%	18W±10%
Total Lumens	1800 lm	1620 lm	1620lm
Lumens Efficiency	100 lm/W	90 lm/W	90lm/W
Color Temp.	6000±500 K	4000±500 K	3000±500 K
CRI	>80	>80	>80
Beam Angle	120°	120°	120°
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Life time	≥40000 hrs	≥40000 hrs	≥40000 hrs
Dimensions	1190 X 35 mm	1190 X 36 mm	1190 X 35 mm
Weight	420 ± 20 g	420 ± 20 g	420 ± 20 g
Lens Type	Foggy	Foggy	Foggy

Remarks


- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

LUMINOUS INTENSITY DISTRIBUTION


子午面配光曲线




最大光强分布曲线




光谱曲线图

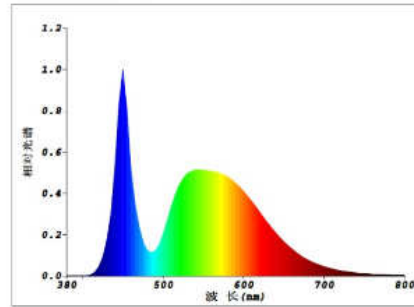

色容差图

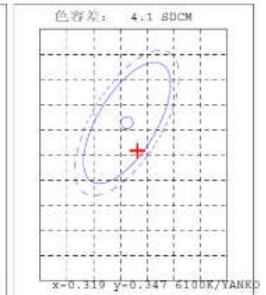

Wiring Diagram

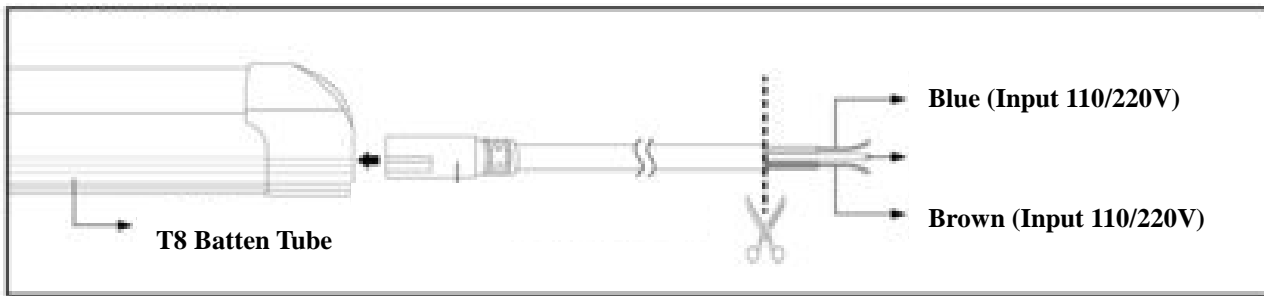

Installation Method

(A)



- ① : Stabilize mounting bracket on mounting area with screws (not required if unnecessary)
- ② : Snap tube fixture onto the mounting bracket.
- ③ : Connect AC circuit.


(B)



Tube fixture serial connection 1





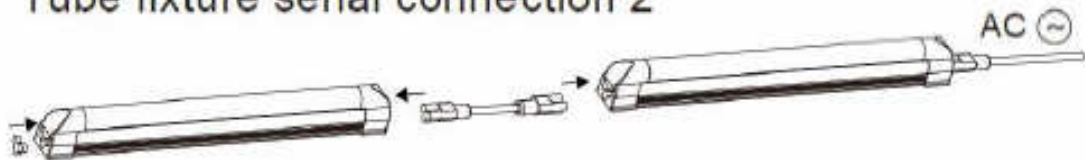


Tube fixture serial connection 2



Connection limit: maximum tube connection length at 110V:16ft
maximum tube connection length at 220V:32ft

Accessory

Power cord x 1	Stopper x 1
	
Screw x 2	Grommet x 2
	

Connector x 1

25cm Connector x 1
