




LED CANDLE LIGHT (3W)



Dimension:

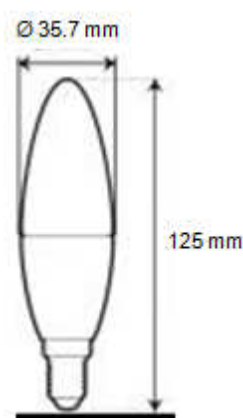

Specification

Model No.	LOM-CAC03F7-X	LOM-CAN03F7-X	LOM-CAW03F7-X
Input Voltage	AC100/230V	AC100/230V	AC100/230V
Rated Power	3W±10%	3 W±10%	3 W±10%
Total Lumens	C:285 lm ,F:270 lm	C:255lm, F:240 lm	C:255lm, F:240 lm
Lumens Efficiency	C:95lm /W, F:90 lm/W	C:85lm /W, F:80 lm/W	C:85lm /W, F:80 lm/W
Color Temp.	5800~6300K	4000~4500K	2700 ~3200K
CRI	≥ 70	≥ 70	≥ 70
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Base	E27/E14	E27/E14	E27/E14
Life Time	≥ 30000 hrs	≥ 30000 hrs	≥ 30000 hrs
Beam angle	120°	120°	120°
Dimensions	37.5(W) *125(H) mm	37.5(W) *125(H) mm	37.5(W) *125(H) mm
Weight	47±20 g	47±20 g	47±20 g
Lens Type	Clear/Foggy	Clear/Foggy	Clear/Foggy



Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.1

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

Light Distribution Curve

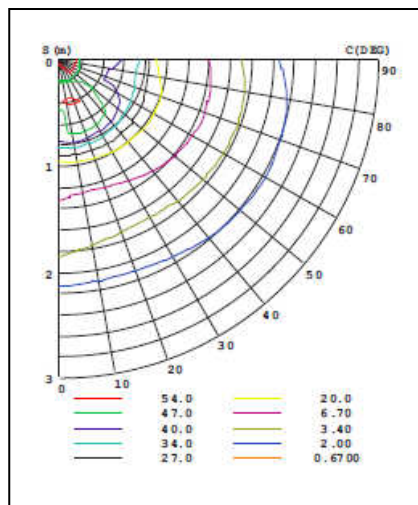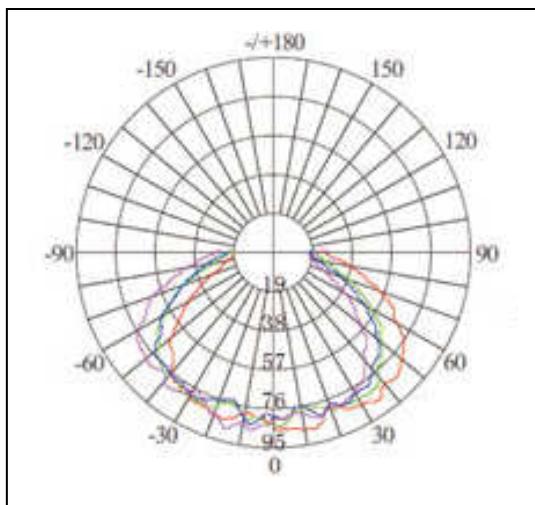

Package

Carton:100pcs Unit Boxes

