




20W LED Streetlight


20W 4~9m Illuminance Distribution Plot

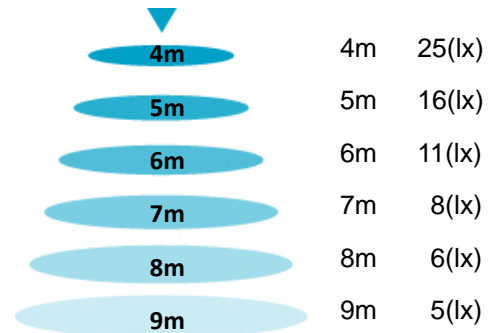


LED STREETLIGHT SPECIFICATION

Model No.	L15-LK.4-1-020-CNIUAB01805-A
Input Voltage	230Vac (180-240V)
Frequency	47-63(Hz)
LED Qty	18(pcs)
Rated Power	20±10%(W)
Lumens per Watt (Efficacy)	>100(lm/W)
Usable lumens(Lm)	>2000(lm)
E _{max}	(Height= 6m): ≥ 11(lx)
	(Height= 9m): ≥ 5(lx)
U _O	(Height= 6m): ≥ 0.40
U _L	(Height= 6m): ≥ 0.60
Color Temp.(CCT)	5000K-6500K
Power Factor	>0.95
CRI	Ra>70
Total Harmonic	<15%
Operating Ambient Temp.	-40°C ~50°C
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40°C ~80°C
Life time	≥ 50000(Hrs)
Architecture	Aluminum Die- Casting & tempered glass
Dimensions (mm)	530(L)*252(W)*90(H)
Weight	5±0.2(kg)
Waterproof	IP66

20W Distribution Plot

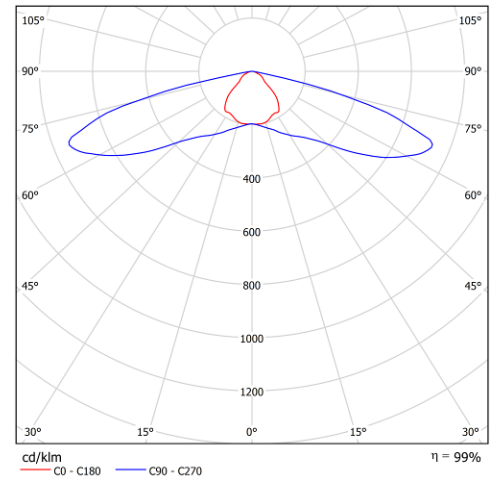

Outline Dimensions

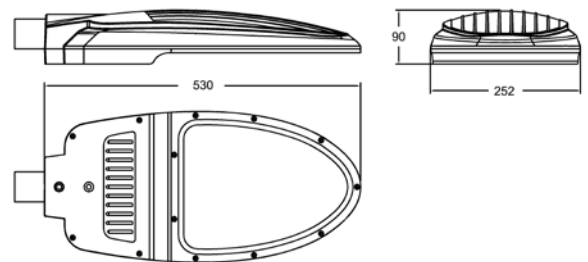

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

