



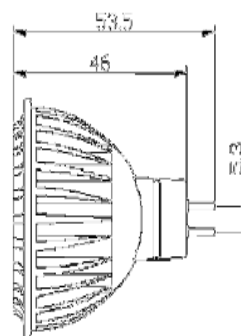

LED MR16 (5W)

Dimension:

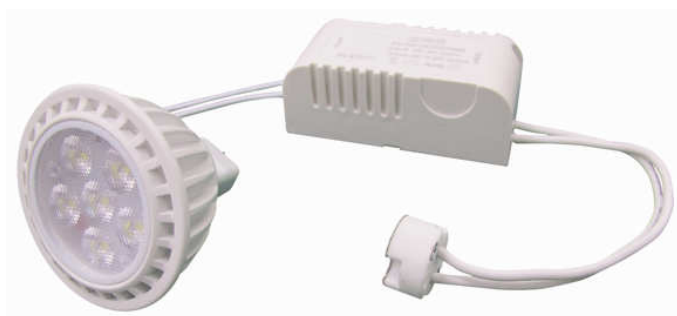

Specification

| Model No. | LOM-MR16C5F8 | LOM-MR16W5F8 |
|-------------------|----------------------|----------------------|
| Input Voltage | AC 100~240V | AC 100~240V |
| Rated Power | 5 W \pm 10% | 5 W \pm 10% |
| Total Lumens | 300 lm | 275 lm |
| Lumens Efficiency | 60 lm/W | 55 lm/W |
| Color Temp. | 6000 \pm 500K | 3000 \pm 500K |
| CRI | 80 | 80 |
| Operating Temp. | -25°C~40°C | -25°C~40°C |
| Base | GU5.3 | GU5.3 |
| Life Time | \geq 30000 hrs | \geq 30000 hrs |
| Beam angle | 25° | 25° |
| Dimensions | 49.5(D) X 53.5(H) mm | 49.5(D) X 53.5(H) mm |
| Weight | 30 \pm 5 g | 30 \pm 5 g |

Remarks

1.The tolerance of luminous flux is \pm 10%.

2. The dimension tolerance is \pm 5mm.


3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V11

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

Illuminance at Distance


Cold White(CCT:6000K)

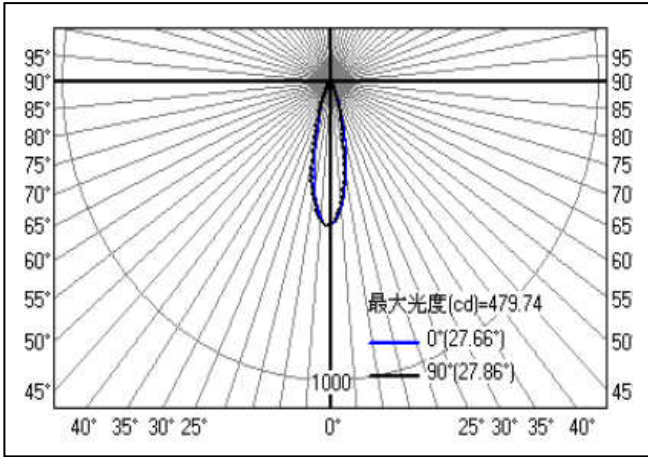

Lux at a Distance

| | | | |
|-----|--------|--------|--------|
| 1 m | 292 lx | 80 cm | 82 cm |
| 2 m | 73 lx | 159 cm | 164 cm |
| 3 m | 32 lx | 239 cm | 245 cm |
| 4 m | 18 lx | 319 cm | 327 cm |
| 5 m | 12 lx | 398 cm | 409 cm |
| 6 m | 8 lx | 478 cm | 491 cm |
| 7 m | 6 lx | 558 cm | 573 cm |
| 8 m | 5 lx | 637 cm | 654 cm |
| 9 m | 4 lx | 717 cm | 736 cm |

Warm White(CCT:3000K)

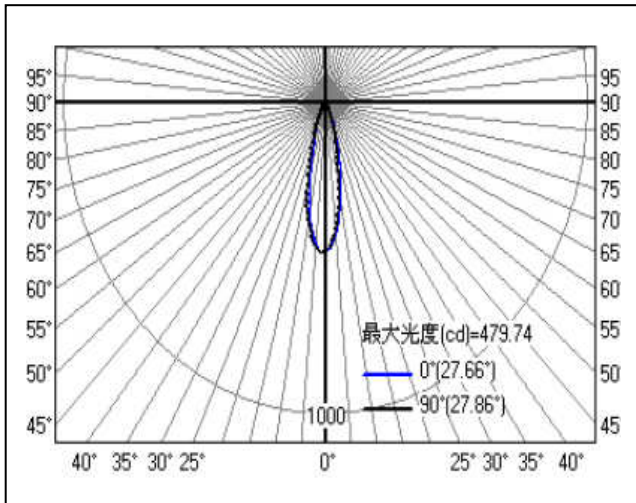


Lux at a Distance

| | | | |
|-----|--------|--------|--------|
| 1 m | 256 lx | 82 cm | 82 cm |
| 2 m | 64 lx | 165 cm | 164 cm |
| 3 m | 28 lx | 247 cm | 246 cm |
| 4 m | 16 lx | 330 cm | 328 cm |
| 5 m | 10 lx | 412 cm | 410 cm |
| 6 m | 7 lx | 495 cm | 492 cm |
| 7 m | 5 lx | 577 cm | 574 cm |
| 8 m | 4 lx | 660 cm | 656 cm |
| 9 m | 3 lx | 742 cm | 738 cm |

Package

1.Single Unit:

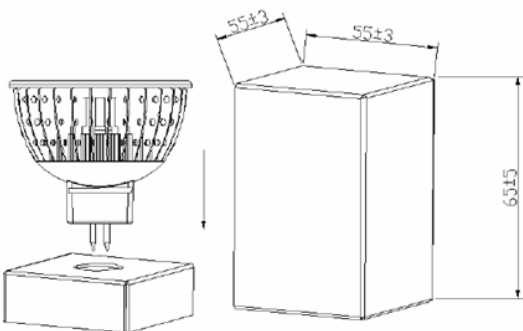

2.Carton:200pcs Unit Boxes

