

LOJ-F5-126 LED Middle-High Mast Light



Specification :

Model No.	LOJ-F5-126-Cxx	LOJ-F5-126-Nxx	LOJ-F5-126-Wxx
Input Voltage	AC 100~277(Vac)		
Frequency	50/60(Hz)		
LED Qty	126(pcs)		
Rated Power	286±10%(W)		
Luminous Flux	19417(lm)	17960(lm)	14892(lm)
Color Temp.(CCT)	6500K±500K	4000K±500K	3000K±500K
Operating Ambient Temp.	-35°C ~50°C		
Operating Ambient Humidity	10%~90%(RH)		
Life time(L70)	≥ 50000(HR)		
Architecture	Aluminum Base		
Dimensions (mm)	734(L)*394(W)*121(H)		
Weight	20.0±0.5(kg)		
Waterproof	IP66		

Remarks

- 1.xx" in Model No. represents different lighting distributions (10 / 25 / 40 / 60), please refer to Distribution Plot in next page for more details
- 2.The Luminous Flux above is calculated based on 10 degree beam angle.
- 3..The tolerance of luminous flux is ±10%.
- 4.The dimension tolerance is ±5mm.
- 5.The appearance and specifications of the product may be modified for improvement without notice.




Product Photo:



Adjust can be précised to 2.5° degree: use flexible, optional sighting accurate positioning for long distance.

Dimension:

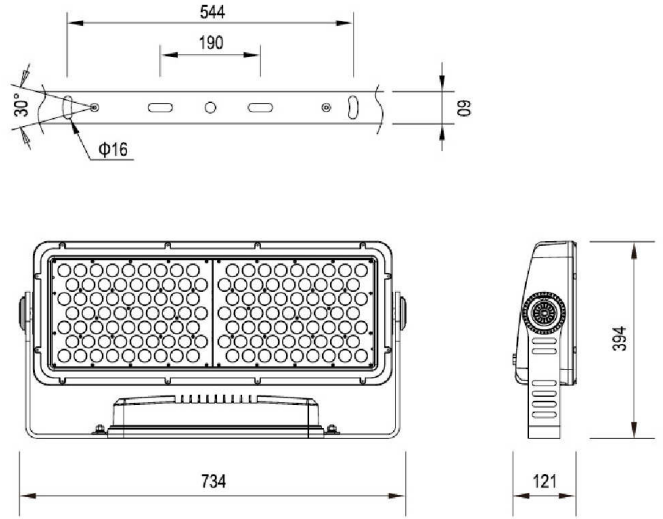

Distribution Plot:

