

LOB-MG LED High Bay Light



Specification :

Model No.	LOB-MG100W-xx	LOB-MG150W-xx	LOB-MG200W-xx	LOB-MG300W-xx
Input Voltage	AC 100~265(Vac)			
Frequency	50/60(Hz)			
LED Qty	96(pcs)	144(pcs)	192(pcs)	288(pcs)
Rated Power	100±10%(W)	150±10%(W)	200±10%(W)	300±10%(W)
Luminous Flux(5700K)	10000(lm)	15000(lm)	20000(lm)	30000(lm)
Color Temp.(CCT)	4000/5000/5700K			
CRI	80			
Power Factor	>0.95			
Operating Ambient Temp.	-35℃ ~50℃			
Architecture	Aluminum Base + PC			
Dimensions (mm)	301(L)*150(W)* 185(H)	452(L)*150(W)* 185(H)	301(L)*301(W)* 185(H)	452(L)*301(W)* 185(H)
Weight	3.7±0.5(kg)	5.0±0.5(kg)	6.6±0.5(kg)	9.9±0.5(kg)
Waterproof	IP65			
Beam Angle	120°			

Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.



Product Photo:



LOB-MG100W-xx



LOB-MG150W-xx




LOB-MG200W-xx




LOB-MG300W-xx


Dimension:

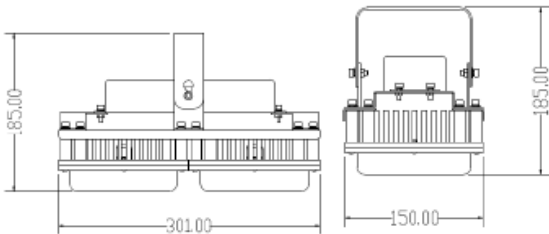


LOB-MG100W-xx

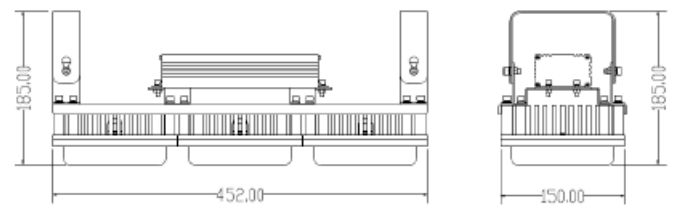

LOB-MG150W-xx

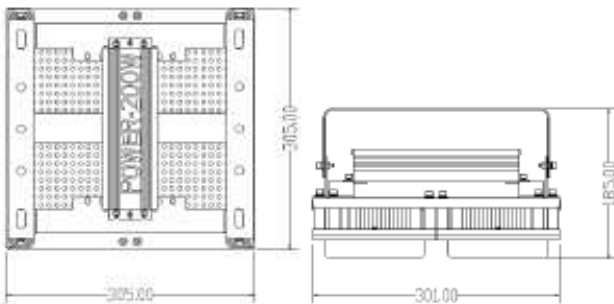


LOB-MG200W-xx

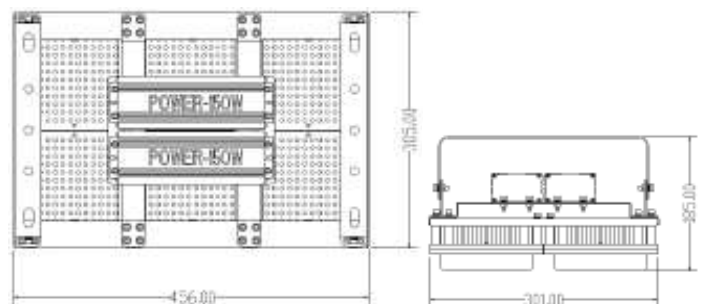


LOB-MG300W-xx

Light Distribution Curve

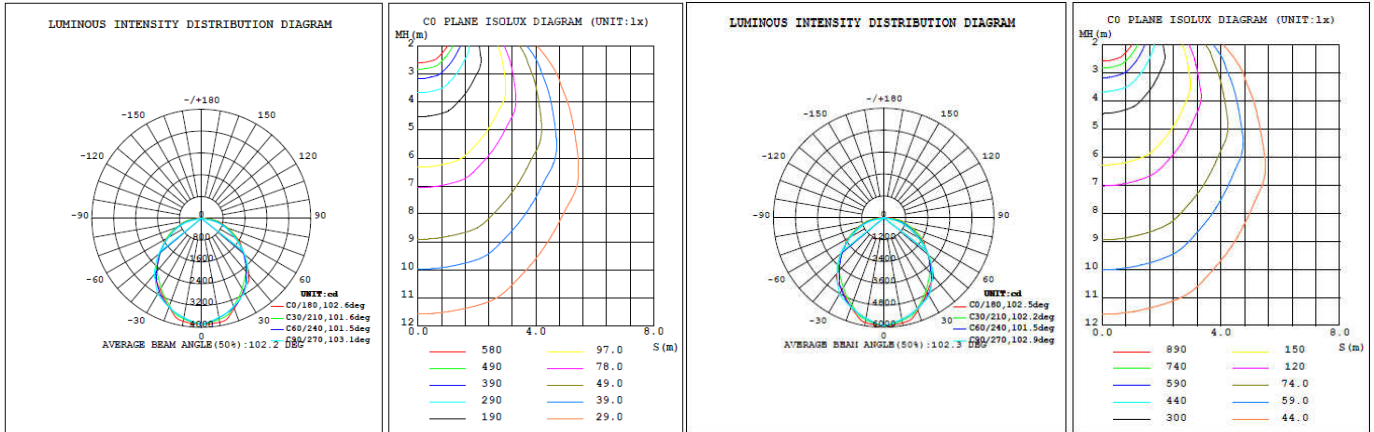

LOB-MG100W-50

LOB-MG150W-50

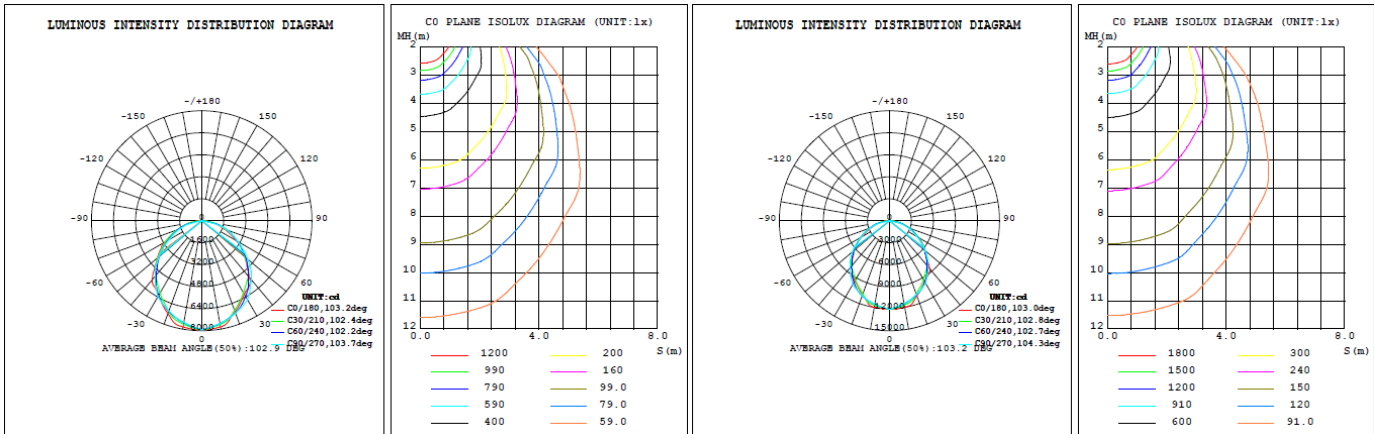

LOB-MG200W-50

LOB-MG300W-50