

LOJ-D3 LED Buried Light



Specification :

Model No.	LOJ-D3-3-x	LOJ-D3-6-x	LOJ-D3-9-x	LOJ-D3-12-x	LOJ-D3-18-x
Input Voltage	AC100~277V DC24V				
Frequency	50/60(Hz)				
LED Qty	3(pcs)	6(pcs)	9(pcs)	12(pcs)	18(pcs)
Rated Power(Single/RGB)	4W 4.6W	8.1W 9.1W	12.5W 12.5W	16W 14.8W	23W 23.2W
Luminous Flux(Single/RGB)	247/88(lm)	600/292(lm)	907/429(lm)	1133/559(lm)	1707/842(lm)
Color Temp.(CCT)	Single/RGB				
Operating Ambient Temp.	-35°C ~50°C				
Operating Ambient Humidity	10%~90%(RH)				
Life time(L70)	≥ 50000(HR)				
Dimensions (mm)	231(L)* 90(W)*110(H)	380(L)* 90(W)*110(H)	534(L)* 90(W)*110(H)	689(L)* 90(W)*110(H)	1000(L)* 90(W)*110(H)
Control Mode	CC/DMX512				
Glass Surface Temp.	40°C				
Weight	1.7±0.5(kg)	2.45±0.5(kg)	3.28±0.5(kg)	4.12±0.5(kg)	5.72±0.5(kg)
Waterproof	IP67				
Beam Angle	30° x65°				

Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196



Product Photo:



LOJ-D3-3-x



LOJ-D3-6-x



LOJ-D3-9-x




LOJ-D3-12-x




LOJ-D3-18-x

Dimension:

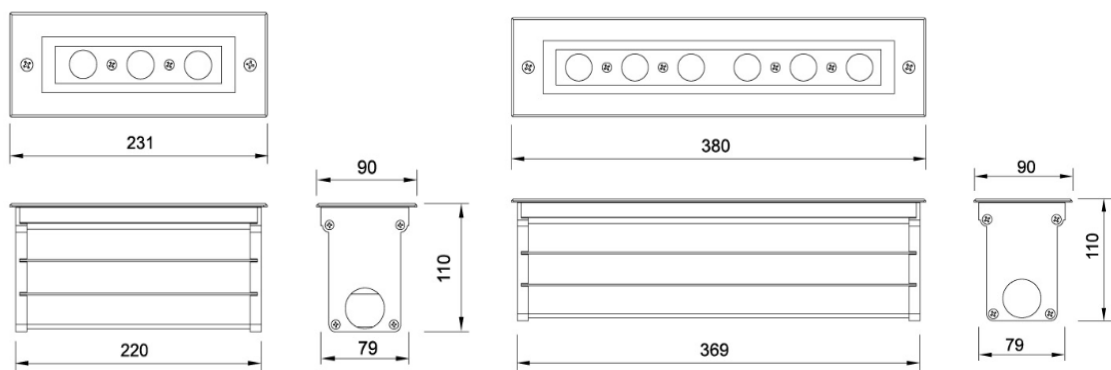


LOJ-D3-3-x


LOJ-D3-6-x

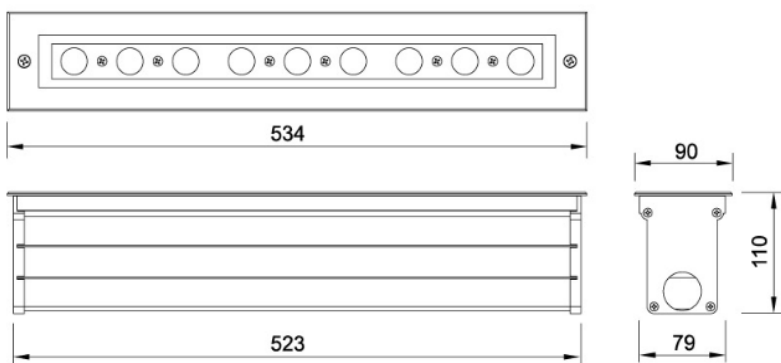

LOJ-D3-9-x



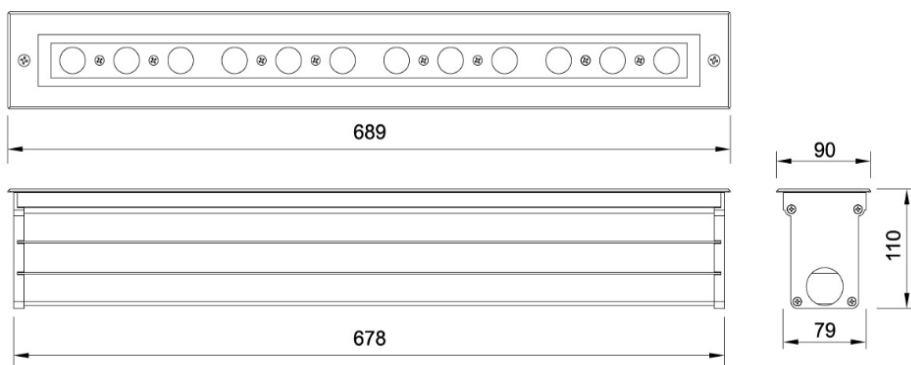


LOJ-D3-12-x

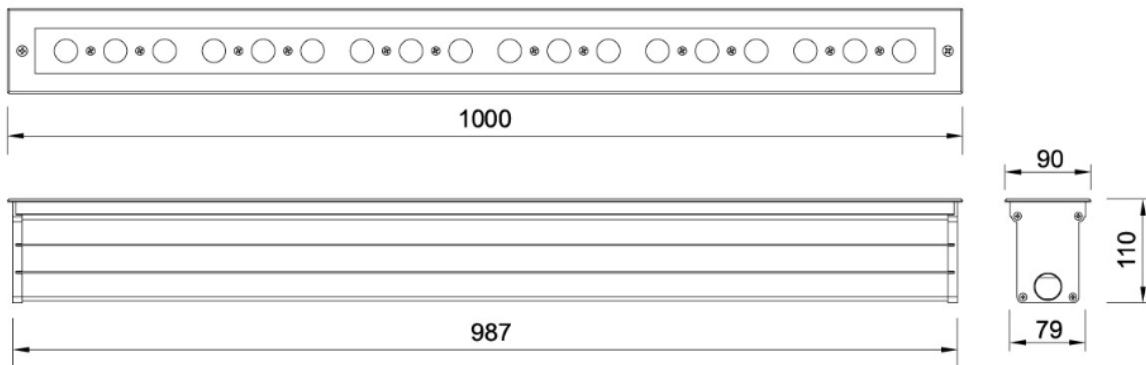


LOJ-D3-18-x


Distribution Plot:

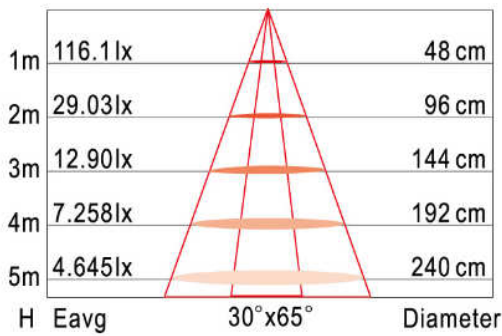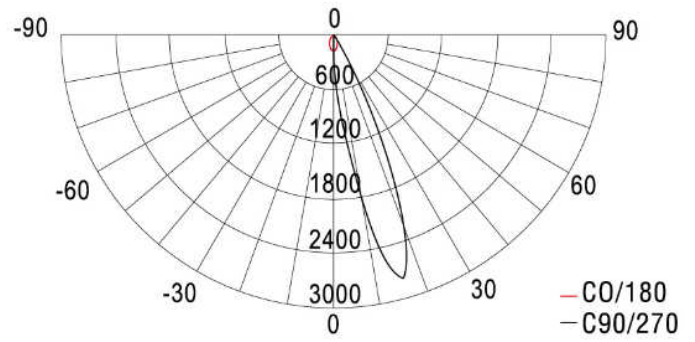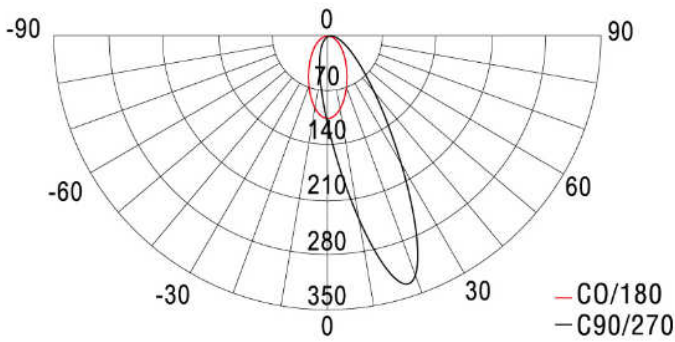


LOJ-D3-3-x

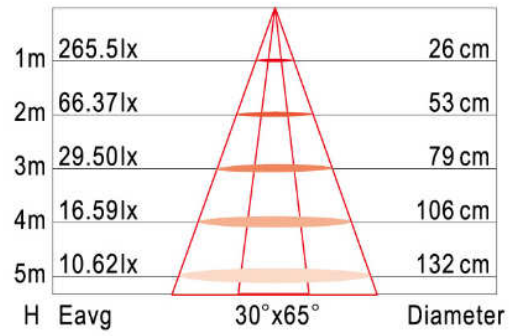



LOJ-D3-6-x


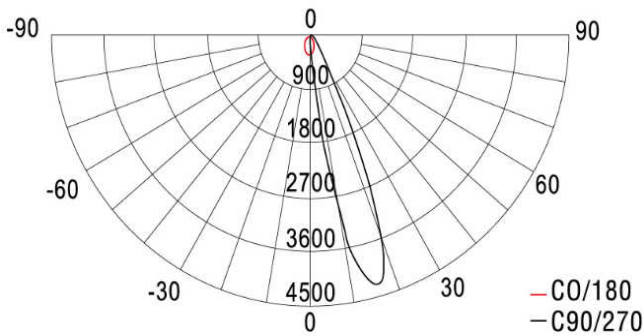


LOJ-D3-9-x

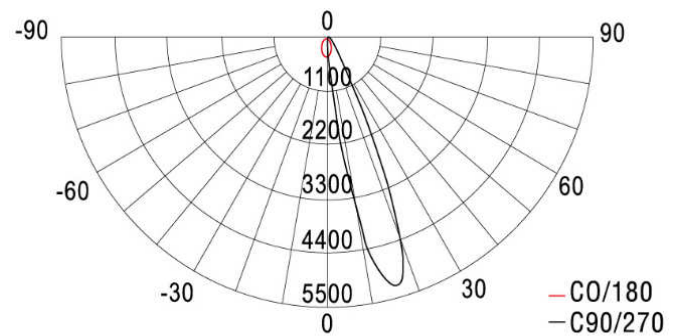

LOJ-D3-12-x

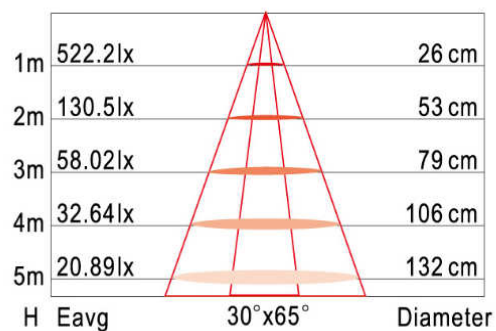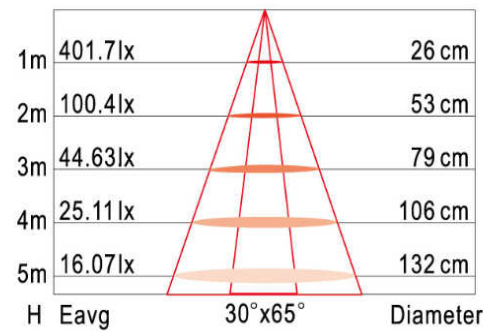

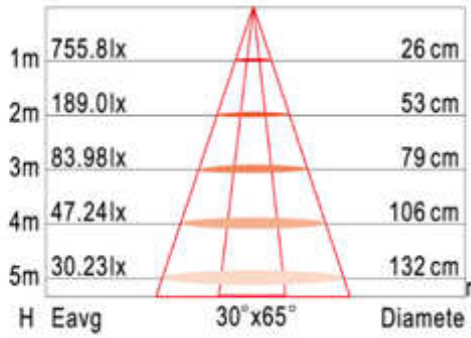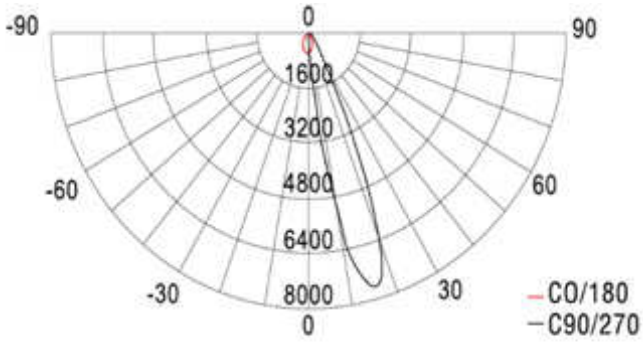

LOJ-D3-18-x