




60W Circular High Bay


60W 3~18m Illuminance Distribution Plot

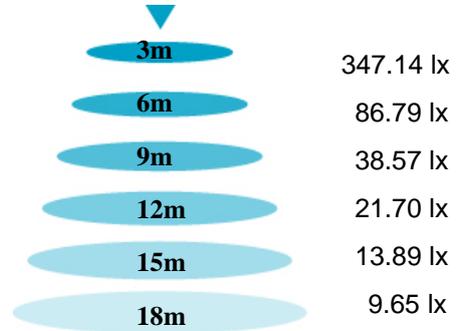


LED Highbay Light Specification

Model No.	60W Circular High Bay Light
Input Voltage	AC 100~277 V
Rated Power	60 ± 10% W
Frequency	50/60 Hz
LED Qty	32 pcs
Lumens per Watt	≥ 75 lm/W
Color Temp.	4700 ~ 6000 K
Usable lumens	≥ 4500 lm
E _{max}	(Height = 6m): ≥ 86.79 lx
	(Height = 12m): ≥ 21.70 lx
CRI	Ra >70
Power Factor	>0.95
Operating Ambient Temp.	-40°C ~ 50°C
Operating Ambient Humidity	10% ~ 90% RH
Store Temp.	-40°C ~ 80°C
Life time	≥ 50000 hrs
Architecture	Aluminum casting & tempered glass
Dimensions	Φ528 × 142 mm
Weight	4.0 ± 0.2 kg

60W Distribution Plot

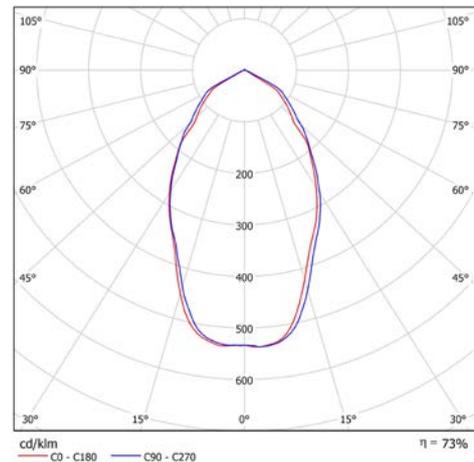

Outline Dimensions

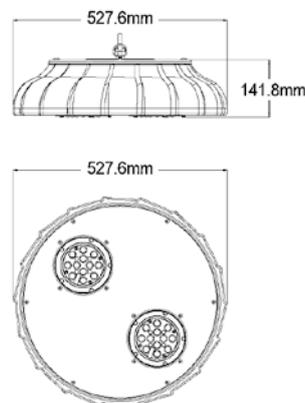

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.