




LED Highbay Light Specification


Model No.	150W Circular High Bay Light
Input Voltage	AC 100~277 V
Rated Power	150 ± 10% W
Frequency	50/60 Hz
LED Qty	64 pcs
Lumens per Watt	≥80 lm/W
Color Temp.	4700 ~ 6000 K
Usable lumens	≥12000 lm
E _{max}	(Height = 7m): ≥159.40 lx
	(Height = 13m): ≥46.22 lx
CRI	Ra >70
Power Factor	>0.95
Operating Ambient Temp.	-40°C ~ 50°C
Operating Ambient Humidity	10% ~ 90% RH
Store Temp.	-40°C ~ 80°C
Life time	≥50000 hrs
Architecture	Aluminum casting & tempered glass
Dimensions	Φ528 × 142 mm
Weight	6.0 ± 0.2 kg

150W Circular High Bay


150W 4~19m Illuminance Distribution Plot

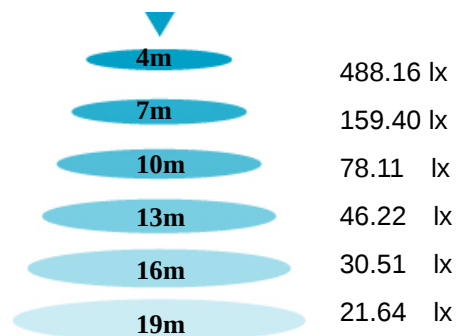

150W Distribution Plot

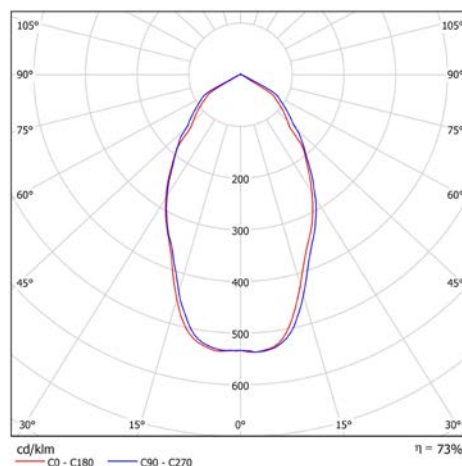

Outline Dimensions

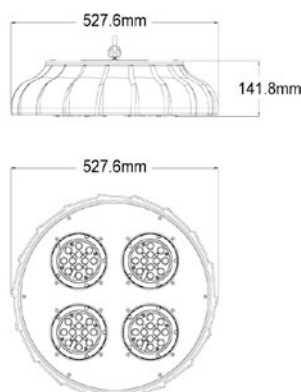

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.