




LED MR16 (5W)



Dimension:

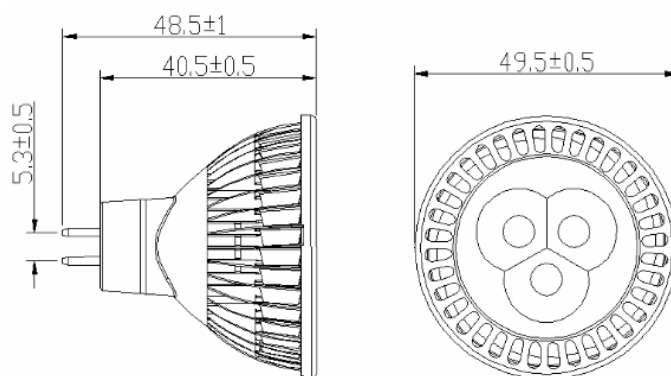

Specification


Model No.	LOM-MR16C5AX	LOM-MR16N5AX	LOM-MR16W5AX
Input Voltage	12V DC/AC	12V DC/AC	12V DC/AC
Rated Power	5 W±10%	5W±10%	5 W±10%
Total Lumens	325 lm	275 lm	275 lm
Lumens Efficiency	65 lm/W	55 lm/W	55 lm/W
Color Temp.	6000 ±500K	4000 ±500K	3000 ±500K
CRI	80	80	80
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Base	GU5.3	GU5.3	GU5.3
Life Time	≥ 30000 hrs	≥ 30000 hrs	≥ 30000 hrs
Beam angle	A1:25°/A2:45°	A1:25°/A2:45°	A1:25°/A2:45°
Dimensions	49.5(D) X 48.5(H) mm	49.5(D) X 48.5(H) mm	49.5(D) X 48.5(H) mm
Weight	28 g	28 g	28 g

Remarks


1. The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Illuminance at Distance


25° Lens :Clear

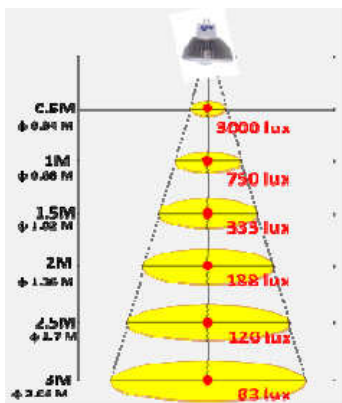


25° Lens :Foggy

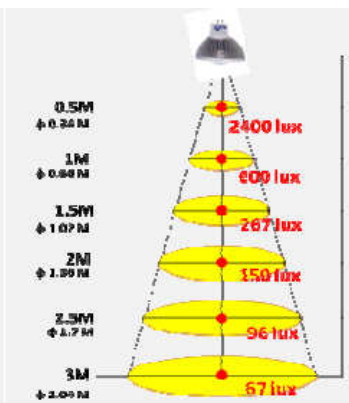


45° Lens :Clear

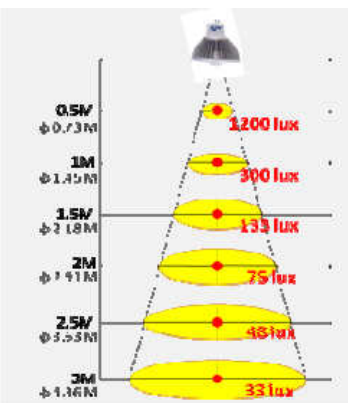

45° Lens :Foggy

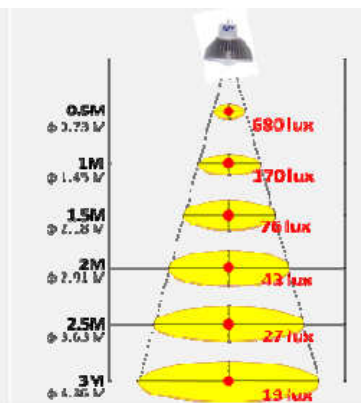


Wiring Diagram

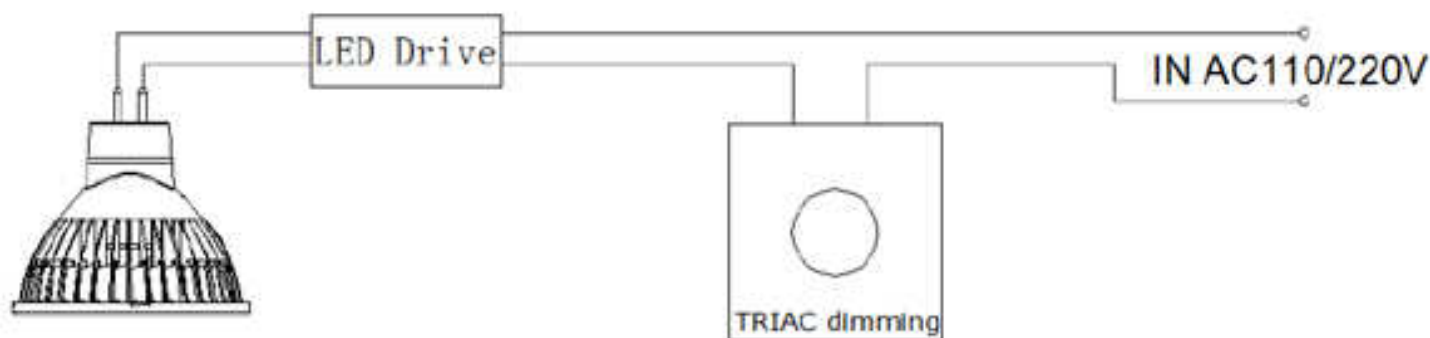

Package

1.Single Unit:

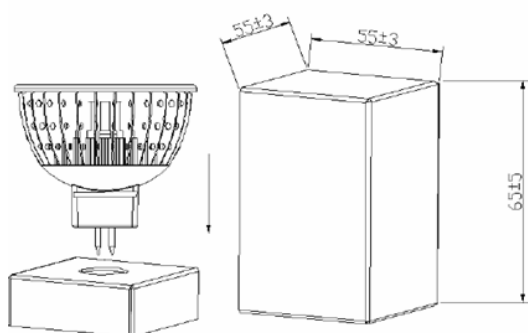

2.Carton:200pcs Unit Boxes

