




LED STREETLIGHT SPECIFICATION


Model No.	L12-LS12-1-075-RNIPPX04865-A
Input Voltage	AC 120~277(Vac)
Frequency	50/60(Hz)
LED Qty	48(PCS)
Rated Power	75±10%(W)
Lumens per Watt (Efficacy)	105 (lm/W)
E _{max}	(Height= 8m): ≥ 64(lx)
	(Height= 10m): ≥ 41 (lx)
U _O	(Height= 6m): ≥ 0.40
U _L	(Height= 6m): ≥ 0.60
Color Temp.(CCT)	4000K-6500K
CRI	Ra>70
Power Factor	>0.95
THD_I (%)	<15%
Operating Ambient Temp.	-40℃~50℃
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40℃~80℃
Life time	≥ 50000(HR)
Architecture	Aluminum Base & Tempered glass
Dimensions (mm)	394(L)*285(W)*117(H)
Weight	7.8±0.2 (kg)
Waterproof	IP65

75W LED Streetlight


75W 5~10m Illuminance Distribution Plot

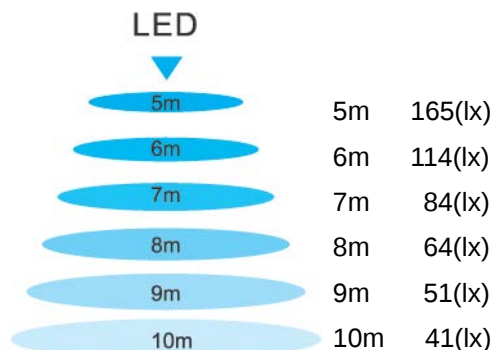

75W Distribution Plot

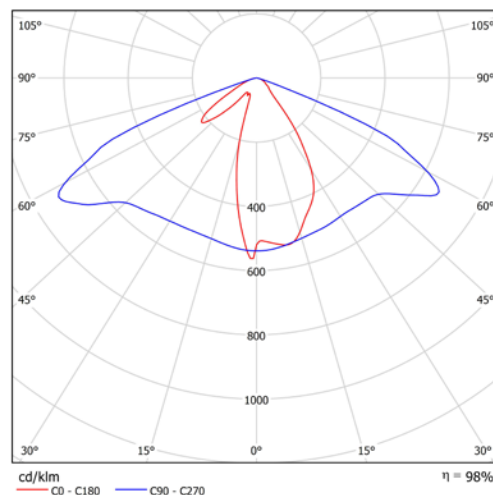

Outline Dimensions

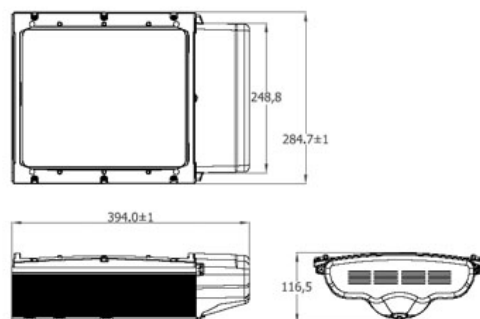

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

