




LED T5 Batten Tube (2ft)

Dimension:

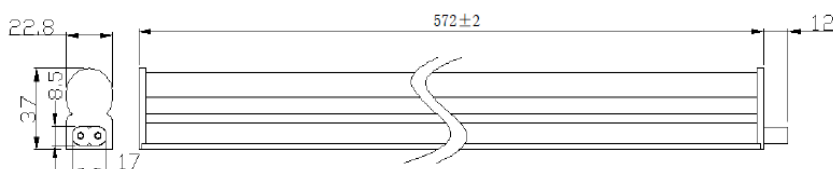

Specification

Model No.	LOM-T5C0906F8-B	LOM-T5N0906F8-B	LOM-T5W0906F8-B
Input Voltage	AC 100 ~ 265V	AC 100 ~ 265V	AC100~265V
Lumens Efficiency	9W±10%	9W±10%	9W±10%
Total Lumens	810 lm	720 lm	720lm
Lumens per Watt	90 lm/W	80 lm/W	80 lm/W
Illuminance@1M	140lux	130lux	130lux
Color Temp.	6000±500 K	4000±500 K	3000±500 K
CRI	>80	>80	>80
Beam Angle	120°	120°	120°
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Life Time	≥40000 hrs	≥40000 hrs	≥40000 hrs
Dimensions	572 X 37 mm	572 X 37 mm	572 X 37 mm
Weight	105 ± 20 g	105 ± 20 g	105 ± 20 g
Lens Type	Foggy	Foggy	Foggy

Remarks

1.The tolerance of luminous flux is ±10%.

2. The dimension tolerance is ±5mm.


3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.1


www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION


子午面配光曲线




最大光强分布曲线




光谱曲线图

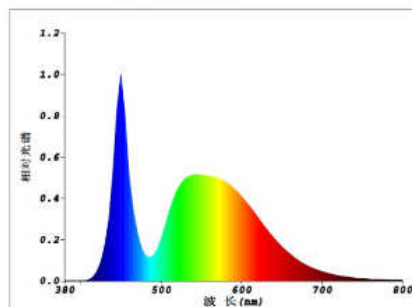

色容差图



Wiring Diagram

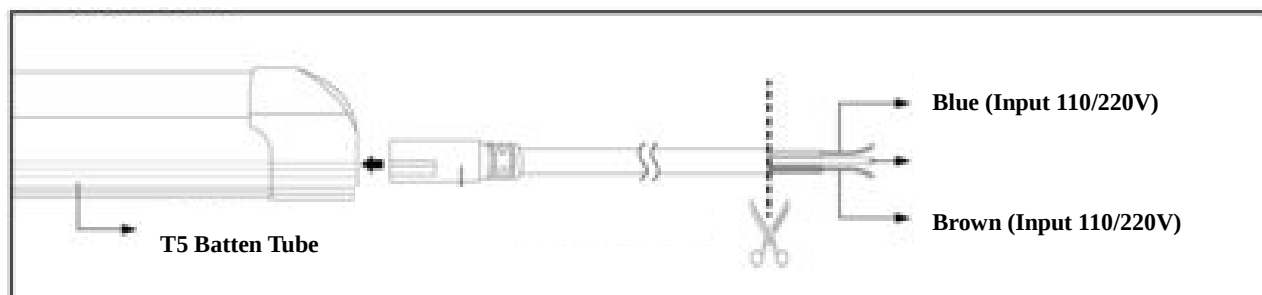

Installation Method

(A)




- ① : Stabilize mounting bracket on mounting area with screws (not required if unnecessary)
- ② : Snap tube fixture onto the mounting bracket.
- ③ : Connect AC circuit.


(B)



Tube fixture serial connection 1

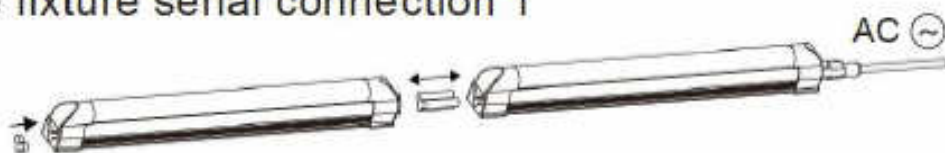


Tube fixture serial connection 2

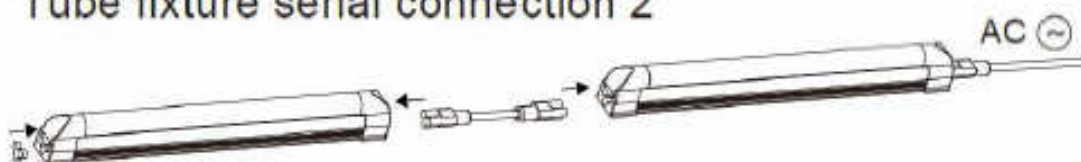

Connection limit: maximum tube connection length at 110V:16ft
maximum tube connection length at 220V:32ft

Accessory

Power cord x 1	Stopper x 1
	
Screw x 2	Grommet x 2
	

Connector x 1

25cm Connector x 1
