




10W Fully Illuminated Bulb (320°)

Dimension:

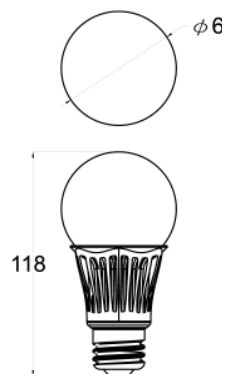

Specification

Model No.	A19SF-010-FFN-50-NCA	A19SF-010-FFN-30-NCE
Input Voltage	AC 00~240V	AC 100~240V
Rated Power	10W±10%	≥ 10W±10%
Total Lumens	≥ 900 lm	850 lm
Lumens Efficiency	90 lm/W	85 lm/W
Color Temp.	5028±283K	3045±175K
CRI	Ra 80	Ra 80
Power Factor	>0.9	>0.9
Beam Angle(10%)	320°	320°
Base	E26/E27	E26/E27
Operating Temp.	-25°C~40°C	-25°C~40°C
Life time	≥ 40000 hrs	≥ 40000 hrs
Dimensions	φ 60*118mm	φ 65*118mm
Weight	125± 20 g	125 ± 20 g

Remarks

1.The tolerance of luminous flux is ±10%.


2. The dimension tolerance is ±5mm.

3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.



Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.1

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION

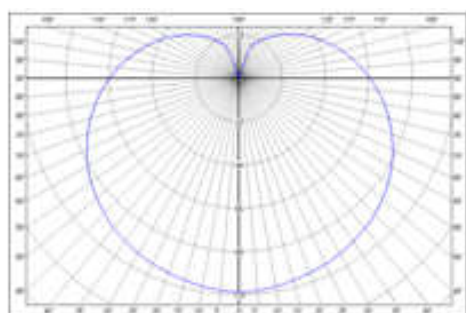


Beam Angle (10%) : 320 degree.
Beam Angle (50%) : 205 degree.

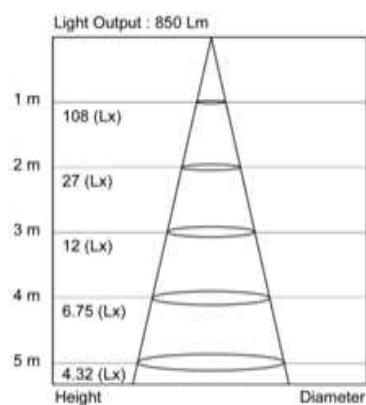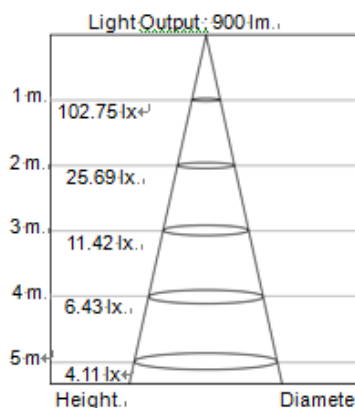

PACKAGE DRAWING

Dimensions :

Box :68*68*120mm

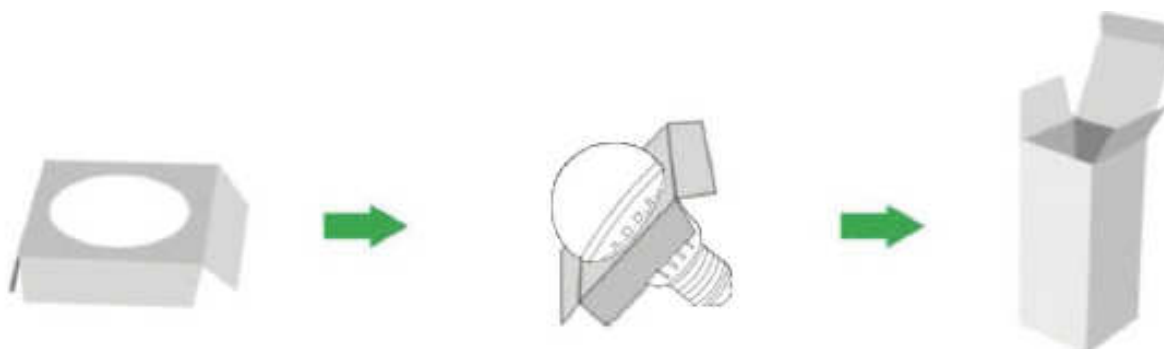

Carton:520*325*325mm

Package: one bulb in an inner box, one master carton contain 100 inner boxes.

