

LOJ-B3-30 LED Garden Light



Specification :

Model No.	LOJ-B3-30-C	LOJ-B3-30-N	LOJ-B3-30-W
Input Voltage	AC 100~277(Vac)		
Frequency	50/60(Hz)		
LED Qty	24(pcs)		
Rated Power	30±10%(W)		
Luminous Flux	1851(lm)	1512(lm)	971(lm)
Color Temp.(CCT)	6500K±500K	4000K±500K	3000K±500K
CRI	Ra>70		
Power Factor	>0.9		
Operating Ambient Temp.	-35℃~50℃		
Operating Ambient Humidity	10%~90%(RH)		
Life time(L70)	≥ 50000(HR)		
Architecture	Aluminum Base		
Dimensions (mm)	580(L)*998(H)		
Weight	10.7±0.5(kg)		
Waterproof	IP65		

Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.2


www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196





Product Photo:



Dimension:

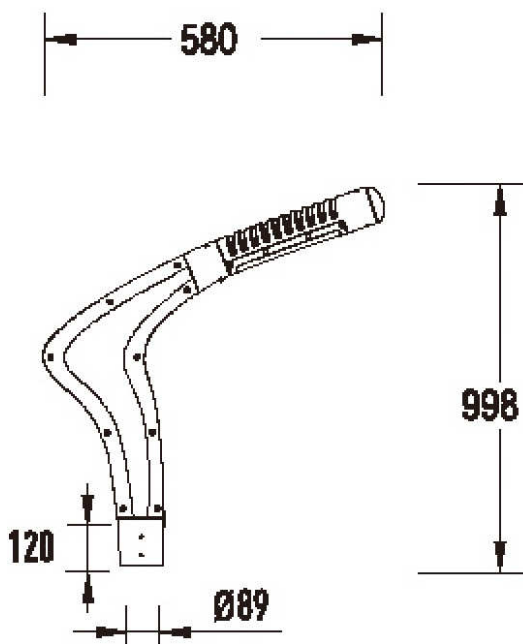

Distribution Plot:

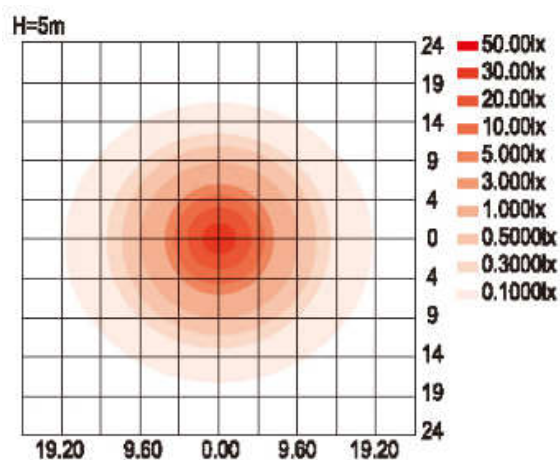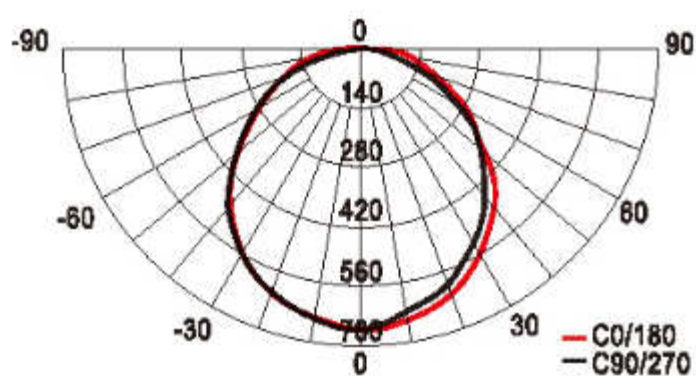

Installation model:



Lock the safety rope



Connect the waterproof plugs



Tighten the screws

