

LOJ-F3 LED Projector Light




Specification :

Model No.	LOJ-F3-3 -xxx	LOJ-F3-6 -xxx	LOJ-F3-9 -xxx	LOJ-F3-12 -xxx	LOJ-F3-18 -xxx	LOJ-F3-24 -xxx
Input Voltage	AC 100~277(Vac)					
Frequency	50/60(Hz)					
LED Qty	3(pcs)	6(pcs)	9(pcs)	12(pcs)	18(pcs)	24(pcs)
Rated Power(Single/RGB)	4W	8W	12W	15.6W	23.4W	29.8W
	3.5W	7.8W	11.8W	16.2W	22.2W	28.2W
Luminous Flux(Single/RGB)	327(lm)	577(lm)	942(lm)	1150(lm)	1621(lm)	1951(lm)
	140(lm)	292(lm)	422(lm)	547(lm)	810(lm)	1057(lm)
Color Temp.(CCT)	Single/RGB					
Operating Ambient Temp.	-35℃~50℃					
Operating Ambient Humidity	10%~90%(RH)					
Life time(L70)	≥ 50000(HR)					
Dimensions (mm)	117(L)*110(W)*148(H)		170(L)*170(W)*176(H)		224(L)*224(W)*208(H)	
Control Mode	CC/DMX512					
Weight	0.92	0.95	1.92	2.02	3.6	3.75
	±0.5(kg)	±0.5(kg)	±0.5(kg)	±0.5(kg)	±0.5(kg)	±0.5(kg)
Waterproof	IP66					
Beam Angle	10 ° ,25 ° 40 ° ,60 °	25 ° ,40 ° 60 °	10 ° ,25 ° ,40 ° ,60 °			



Model No.	LOJ-F3-36-xxx	LOJ-F3-54-xxx	LOJ-F3-72-xxx
Input Voltage	AC 100~277(Vac)		
Frequency	50/60(Hz)		
LED Qty	36(pcs)	54(pcs)	72(pcs)
Rated Power(Single/RGB)	58W	85W	113W
	86W	128W	163W
Luminous Flux(Single/RGB)	4801(lm)	7201(lm)	9601(lm)
	2718(lm)	4240(lm)	5327(lm)
Color Temp.(CCT)	Single/RGB		
Operating Ambient Temp.	-35°C~50°C		
Operating Ambient Humidity	10%~90%(RH)		
Life time(L70)	≥ 50000(HR)		
Dimensions (mm)	290(L)*263(W)*390(H)	302(L)*290(W)*417(H)	344(L)*340(W)*454(H)
Control Mode	CC/DMX512		
Weight	7.5±0.5(kg)	9.5±0.5(kg)	12.4±0.5(kg)
Waterproof	IP66		
Beam Angle	10 ° ,25 ° 40 ° ,60 °		

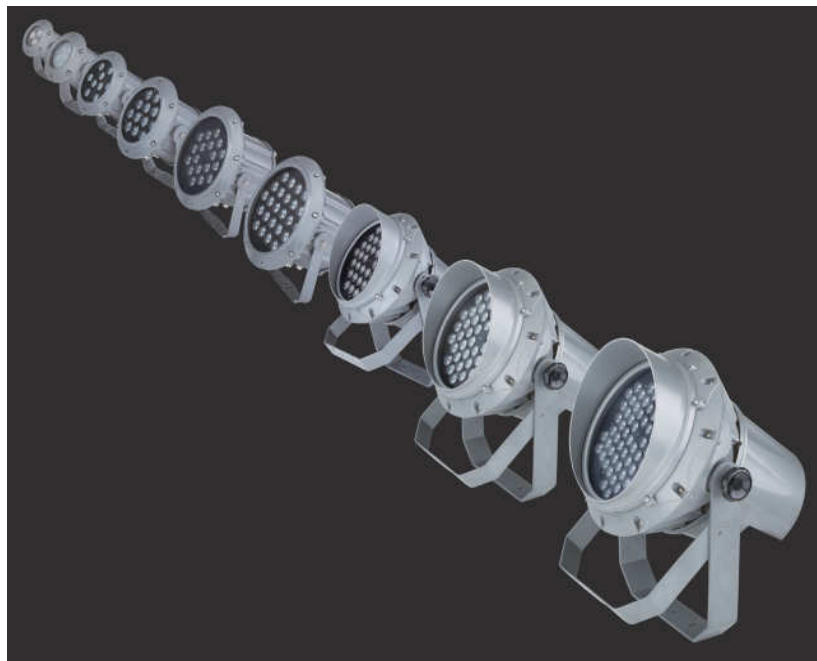

Remarks

- 1".xx" in Model No. represents different lighting distributions (10 / 25 / 40 / 60), please refer to Distribution Plot in next page for more details
- 2.The Luminous Flux above is calculated based on 10 degree beam angle.
- 3..The tolerance of luminous flux is ±10%.
- 4.The dimension tolerance is ±5mm.
- 5.The appearance and specifications of the product may be modified for improvement without notice.
- 6.All parameters of products are based on the measurement of Laster Tech laboratory.



Product Photo:



LOJ-F3-3-xxx



LOJ-F3-6-xxx



LOJ-F3-9-xxx



LOJ-F3-12-xxx



LOJ-F3-18-xxx



LOJ-F3-24-xxx



LOJ-F3-36-xxx




LOJ-F3-54-xxx



LOJ-F3-72-xxx


Dimension:

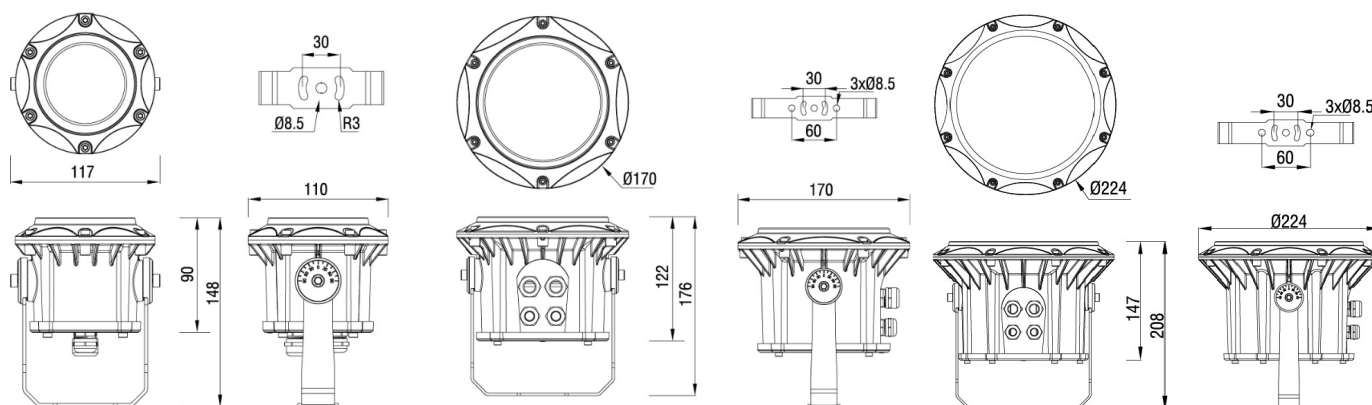

LOJ-F3-3-xxx/LOJ-F3-6-xxx

LOJ-F3-9-xxx/LOJ-F3-12-xxx

LOJ-F3-18-xxx/LOJ-F3-24-xxx








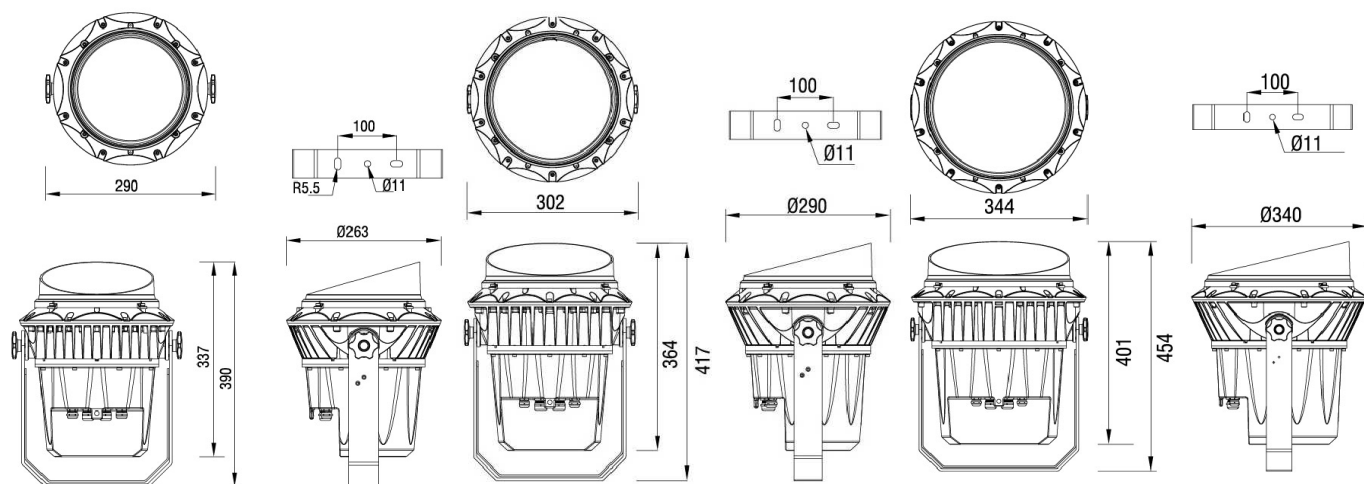


LOJ-F3-36-xxx







LOJ-F3-54-xxx

LOJ-F3-72-xxx









Distribution Plot:










LOJ-F3-3-xxx



















LOJ-F3-6-xxx



LOJ-F3-9-xxx



















LOJ-F3-12-xxx




LOJ-F3-18-xxx

LOJ-F3-24-xxx



LOJ-F3-36-xxx

LOJ-F3-54-xxx

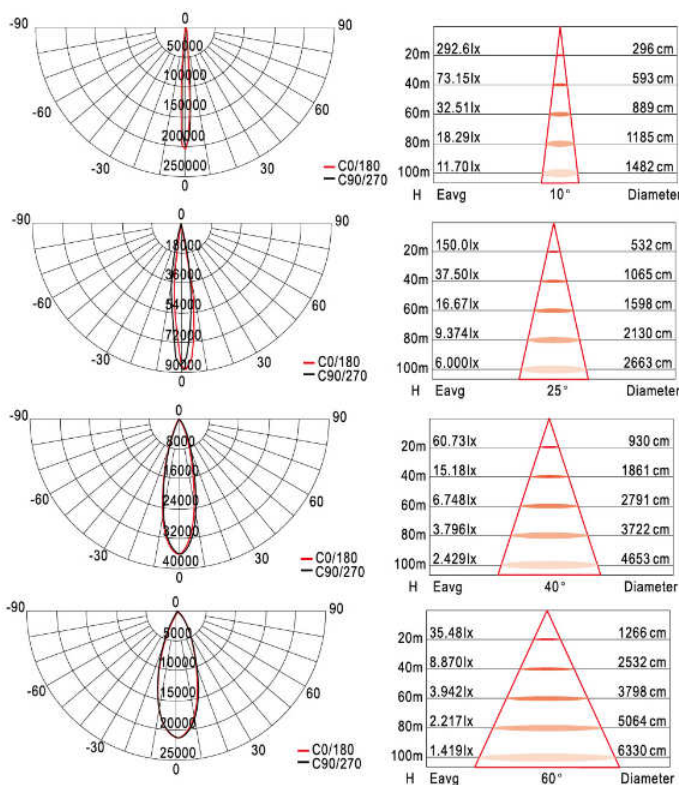

LOJ-F3-72-xxx