



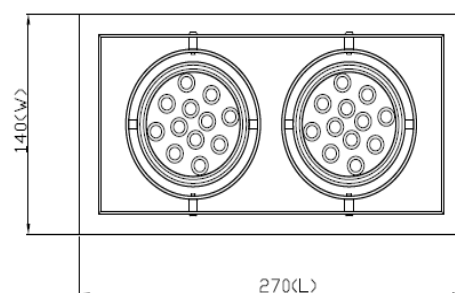

LED Down Light AR111 (14W)

Dimension:

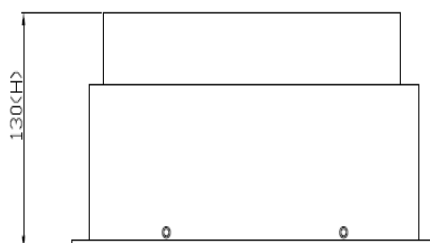


Specification

Model No.	LOM-DAR111C14F8	LOM-DAR111N14F8	LOM-DAR111W14F8
Input Voltage	AC100~240V	AC100~240V	AC100~240V
Rated Power	14 W±10%	14W±10%	14 W±10%
Luminous Flux	1100lm	1000 lm	1000 lm
Lumens Efficiency	80 lm/W	70 lm/W	70 lm/W
Color Temp.	6000 ±500K	4000 ±500K	3000 ±500K
CRI	≥ 80	≥ 80	≥ 80
Operating Temp.	-25°C~60°C	-25°C~60°C	-25°C~60°C
Life Time	≥ 30000 hrs	≥ 30000 hrs	≥ 30000 hrs
Beam angle	30°	30°	30°
Dimensions	140(W) X 270(L) X130(H)mm	140(W) X 270(L) X130(H)mm	140(W) X 270(L) X130(H)mm
Weight	2.2kg ± 20 g	2.2kg ± 20 g	2.2kg ± 20 g

Remarks


1. The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Beam Angle Light Distribution Curve

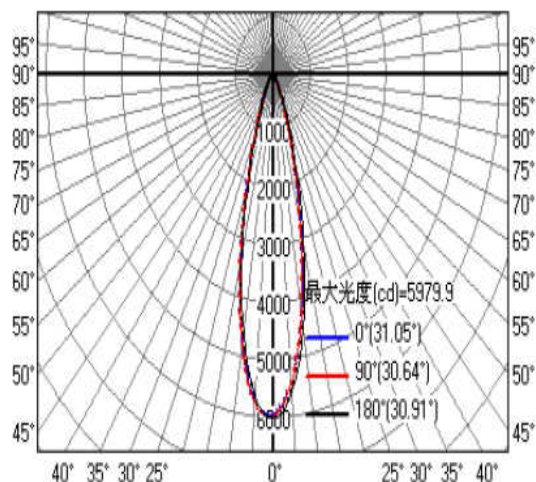


Installation Instruction

① CUTOOUT

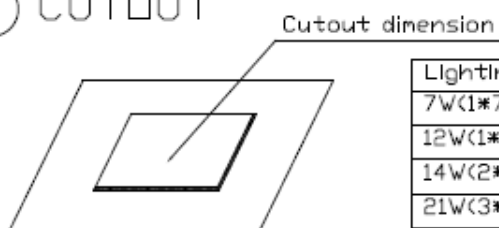

Lighting data	Cutout
7W(1*7W)	120*120mm
12W(1*12W)	160*160mm
14W(2*7W)	120*250mm
21W(3*7W)	365*125mm

② WIRING

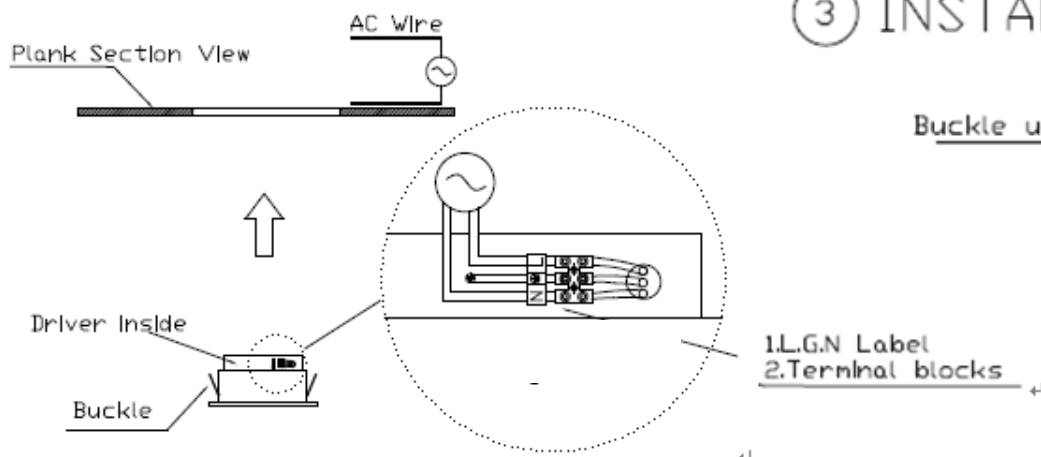

③ INSTALLATION