




480W LED High Pole


480W 5~20m Illuminance Distribution Plot

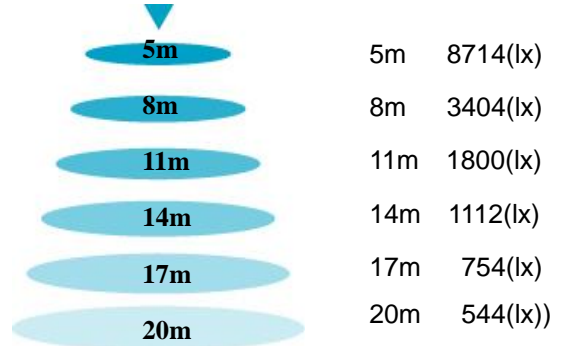


LED HIGH POLE SPECIFICATION

Model No.	LB3-LK.1-1-480-RNIPPX28865-A
Input Voltage	AC 120~277(Vac)
Frequency	47-63(Hz)
LED Qty	288(pcs)
Rated Power	480±10%(W)
Lumens per Watt (Efficacy)	100(lm/W)
E _{max}	(Height= 8m): ≥ 3404(lx)
	(Height= 14m): ≥ 1112(lx)
Color Temp.(CCT)	4000K-6000K
CRI	Ra>70
Power Factor	>0.95
THD_I(%)	<15%
Operating Ambient Temp.	-40°C~50°C
Operating Ambient Humidity	10%~90%(RH)
Store Temp.	-40°C~80°C
Life time	≥ 50000(HR)
Architecture	Aluminum casting & tempered glass
Dimensions (mm)	734(L)*579(W)*149(H)
Weight	27±0.2(kg)
Waterproof	IP65

480W Distribution Plot

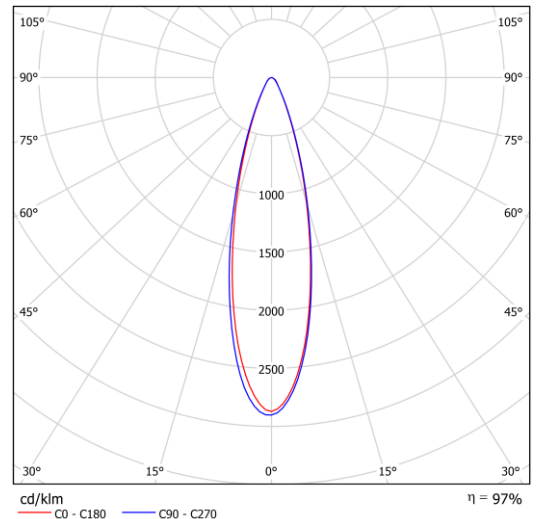

Outline Dimensions

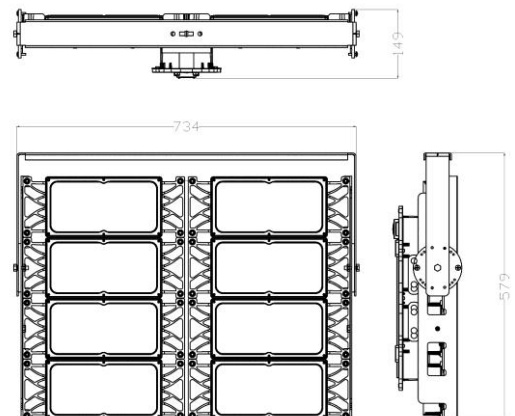

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

