

LOJ-A10-150 LED Street Light



Product Specification

Model No.	LOJ-A10-150-Cxxxx	LOJ-A10-150-Nxxxx	LOJ-A10-150-Wxxxx
Input Voltage	AC 200~240(Vac)		
Frequency	50/60(Hz)		
LED Qty	54(pcs)		
Rated Power	148±10%(W)		
Luminous Flux	16050(lm)	14850(lm)	13950(lm)
Color Temp.(CCT)	6500K±500K	4000K±500K	3000K±500K
CRI	Ra>70		
Power Factor	>0.9		
Operating Ambient Temp.	-35°C ~50°C		
Operating Ambient Humidity	20%~90%(RH)		
Life time(L70)	≥ 50000(HR)		
Architecture	Aluminum Base		
Dimensions (mm)	1120(L)*166(W)*100(H)		
Weight	9.20±0.5(kg)		
Waterproof	IP66		

Remarks


- 1".xxxx" in Model No. represents different lighting distributions (T2-3 / T2-4), please refer to Distribution Plot in next page for more details
- 2.The tolerance of luminous flux is ±10%.
- 3.The dimension tolerance is ±5mm.
- 4.The appearance and specifications of the product may be modified for improvement without notice.
- 5.All parameters of products are based on the measurement of Laster Tech laboratory.






Product Photo




Product Dimension

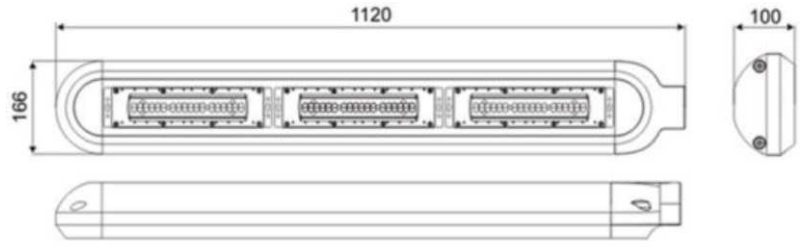

Distribution Plot

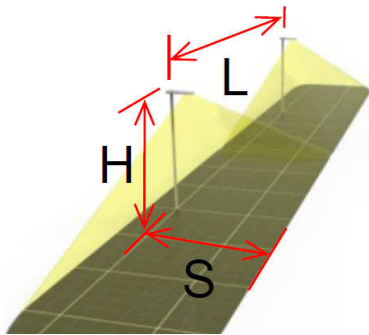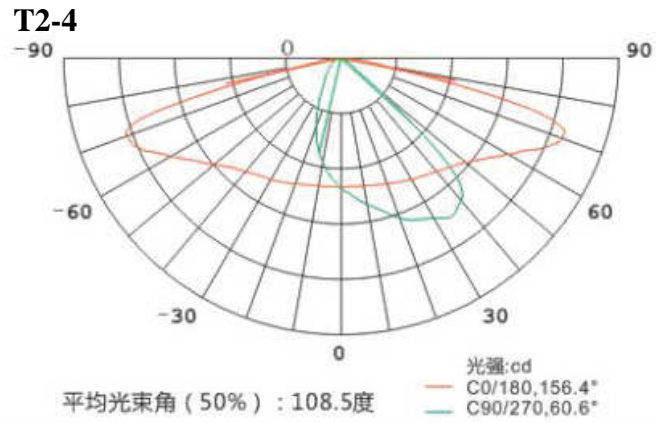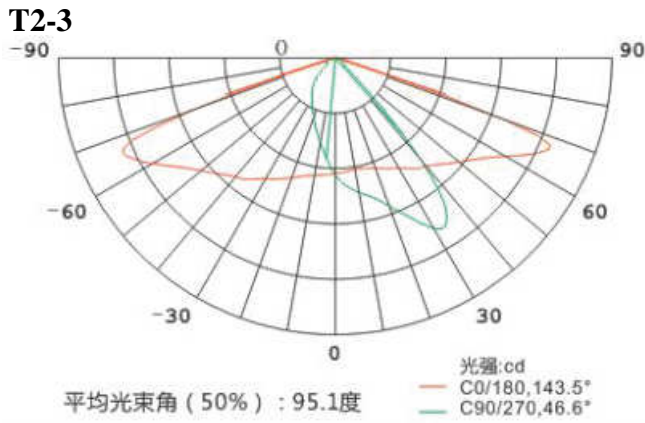

$S/H=0.8$
 $L/H=3.5$

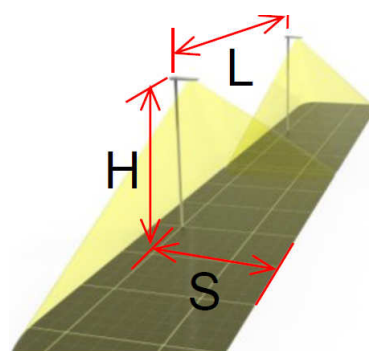

$S/H=1.1$
 $L/H=4.5$